



NEON ARC | RGBW | SILICONE




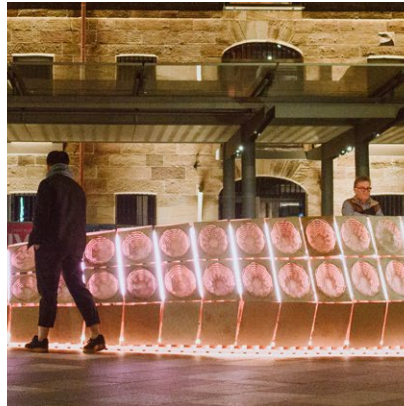


PHOTO CREDIT: VICTOR CARINGAL FROM ARUP

Neon Arc is a square W16 × H17mm, vertical bending model perfect for cove lighting, or architectural features in exterior and interior applications.

RGB White (Red, Green, Blue, and White) ribbon provides a rainbow of colour options. The white can be used independently of the colours or in combination creating of soft pastel effects.

Neon is made to order, check with our team for lead times.

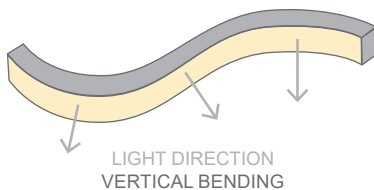

*STATIC VS DYNAMIC OPERATING

This product has a maximum wattage of 15W/m, made from 4 × colour channels using approximately 3.75W/m each. The white chip can be used on its own or combined with the R, G, B for extra brightness/lumen output. As this uses the full 15W/m this is called Static loading (all colour channels, all powered).

When R, G, B or W channels are used individually or blended to make colour mixes eg blue or purple, the wattage used is below the maximum load and is considered dynamic operating. This also applies when the colours are constantly changing, flashing or fading.

When the maximum wattage of the product is reached, lengths longer than recommended may experience power loss, reduced luminosity & increased heat which can shorten the life of the product.

If unsure about the products intended usage, future proof by choosing the static full loading lengths.

APPLICATIONS

- Creative colour installations. Soften colours to pastels.
- Theatres, bars, restaurants, and retail
- Cove lighting
- Architectural features
- Exterior or interior installations
- Swimming or feature pools

FEATURES

- Neon Arc can be curved in the opposite direction of the other neon products
- UV & flame resistant

| CODE | COLOUR | LUMENS |
|------------------|------------------|----------|
| BL-LS-4800S-RGBW | R 615–625nm | ≥90lm/m |
| | G 520–530nm | ≥240lm/m |
| | B 465–475nm | ≥40lm/m |
| | W 3000K +/- 220K | ≥200lm/m |

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%. SOLD BY THE METRE. IES FILES AVAILABLE. 2700K & 4000K AVAILABLE BY REQUEST.

POWER & TEMP

| | |
|-------------------------------|---|
| LED WATTS | 15W/m |
| INPUT VOLTS | 24V DC Constant voltage |
| OPERATING TEMP. (ENVIRONMENT) | -40°C ~ +45°C |
| MAX. RUN PER POWER FEED | Static full loading* 8m using one feed 16m using two feeds Dynamic operating* 12m using one feed 24m using two feeds |

LIGHT & LIFE

| | |
|---------------|--------------------------|
| CRI | ≥80 (white chip only) |
| BEAM ANGLE | 160° |
| LED PER METRE | 84 |
| SOURCE LIFE | 50,000 hours |
| WARRANTY | 5 years |

PHYSICAL PARAMETERS & CONTROL

| | |
|---------------------|---|
| MINIMUM BEND RADIUS | 150mm |
| BEND DIRECTION | Vertical bending |
| DIMENSIONS | W16 × H17mm |
| INGRESS PROTECTION | IP68 Protection established by use of connectors. <i>Dimensions of connectors shown on installation guide</i> |
| CUTTING LENGTH | 83.3mm |
| HOUSING | UV & flame resistant white silicone with opal diffuser |
| MOUNTING | Profile / clips available <i>SEE PAGE 3.</i> |
| CONTROL | Requires 4-channel RGBW controller or compatible DMX-512 controller |

NEON ARC | RGBW | CONNECTIONS

Neon products are IP rated based on the fitted connections (power feed / end caps).

Bright Light recommend using Slimline injection moulding for the best result, a clean finish and IP68 rating. These are fitted at factory during the production process and can not be altered once produced - **ensure all lengths are double-checked before ordering.**

Power feed connectors are priced & supplied with 1metre cable as standard. Please specific at time of quoting if alternate lengths are required.

SLIMLINE INJECTION MOULDING CONNECTIONS | IP68



REQUIRES FITTING AT FACTORY.
EXACT LENGTH REQUIRED BEFORE PRODUCTION



SIDE FEED



BOTTOM FEED



TOP END FEED



END CAP




300MM FLEXIBLE CONNECTOR





T FEED



NEON ARC | MOUNTING ACCESSORIES

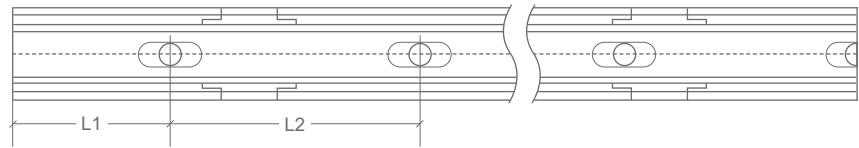




| CODE | ACCESSORY | L1 | L2 | HOLE DIMENSIONS | HOLE NUMBER |
|------------|--|-------|-------|-----------------|-------------|
| BL-LS-4803 | SELF-LOCKING ALUMINIUM PROFILE 2m | 100mm | 200mm | 4 × 10mm | 10 |
| BL-LS-4804 | PLASTIC PROFILE 2m | 100mm | 200mm | Ø3.5mm | 10 |
| BL-LS-4805 | PLASTIC PROFILE 1m | 100mm | 200mm | Ø3.5mm | 5 |
| BL-LS-4813 | BENDABLE STAINLESS STEEL PROFILE 890MM <i>MULTIPLE FIXING LOCATIONS</i> | - | - | - | - |
| BL-LS-4814 | HYBRID PROFILE 2m | 100mm | 200mm | 4 × 10mm | 10 |
| BL-LS-4817 | SERRATED ALUMINIUM CLIP 20MM | 10mm | - | 4 × 10mm | 1 |

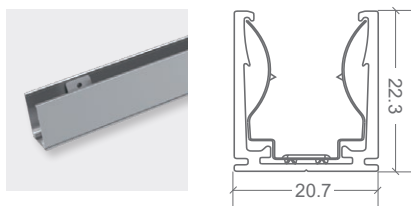



SELF-LOCKING ALUMINIUM PROFILE 2M

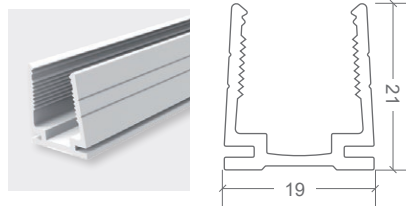



PLASTIC PROFILE

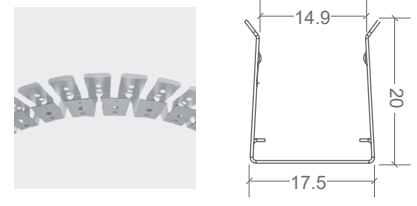

BENDABLE STAINLESS STEEL PROFILE 890MM

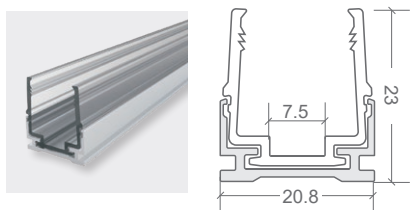

HYBRID PROFILE 2M

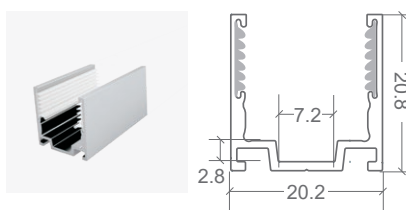

SERRATED ALUMINIUM 20MM MOUNTING CLIP