



NEON ARC | TUNEABLE WHITE | SILICONE





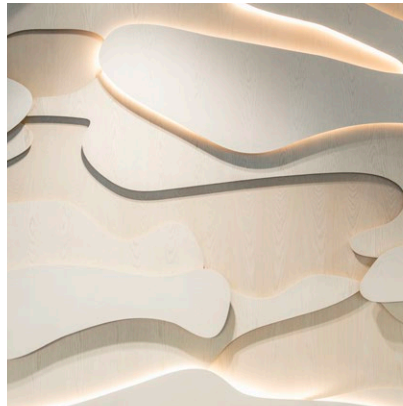


PHOTO CREDIT: BEN WRIGLEY, COURTESY WWW.CREATIVEROAD.COM.AU

Neon Arc is a square W16 × H17mm, vertical bending model perfect for cove lighting, or architectural features in exterior and interior applications.

Tuneable White lighting can be adjusted to suit the environment and time of day. Warmer temperatures create a cosy feel that is perfect for evenings, while cooler temperatures simulate day light, creating a more alert feel.

Neon is made to order, check with our team for lead times.

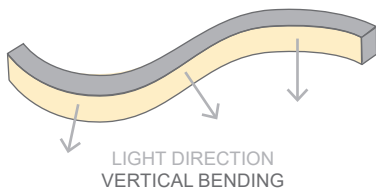

APPLICATIONS

- Ideal for applications where colour temperature adjustment is required
- Cove lighting, handrails, or toe-kicks
- Architectural features
- Exterior or interior installations
- Swimming or feature pools

FEATURES

- Neon Arc can be curved in the opposite direction of the other neon products
- UV & flame resistant

CODE	COLOUR	LUMENS
BL-LS-4825S	WARM WHITE 2200K +/- 160K	≥220lm/m
	COOL WHITE 5700K +/- 285K	≥270lm/m

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%. SOLD BY THE METRE. IES FILES AVAILABLE.

POWER & TEMP


LED WATTS	12W/m
INPUT VOLTS	24V DC Constant voltage
OPERATING TEMP. (ENVIRONMENT)	-40°C ~ +55°C
MAX. RUN PER POWER FEED	15m using one feed 30m using two feeds

LIGHT & LIFE

CRI	≥80
BEAM ANGLE	160°
LED PER METRE	144
SOURCE LIFE	50,000 hours
WARRANTY	5 years

PHYSICAL PARAMETERS & CONTROL

MINIMUM BEND RADIUS	150mm
BEND DIRECTION	Vertical bending
DIMENSIONS	W16 × H17mm
INGRESS PROTECTION	IP67 or IP68 Protection established by use of connectors. <i>Dimensions of connectors shown on installation guide</i> SEE PAGE 2.
CUTTING LENGTH	83.3mm
HOUSING	UV & flame resistant white silicone with opal diffuser
MOUNTING	Profile / clips available SEE PAGE 3.
CONTROL	Requires 2-channel controller



NEON ARC | TUNEABLE WHITE | CONNECTIONS

Neon products are IP rated based on the fitted connections (power feed / end caps).

Bright Light recommend using Slimline injection moulding for the best result, a clean finish and IP68 rating. These are fitted at factory during the production process and can not be altered once produced - **ensure all lengths are double-checked before ordering.**

Power feed connectors are priced & supplied with 1metre cable as standard. Please specific at time of quoting if alternate lengths are required.

SLIMLINE INJECTION MOULDING CONNECTIONS | IP68



REQUIRES FITTING AT FACTORY.
EXACT LENGTH REQUIRED BEFORE PRODUCTION



SIDE FEED



BOTTOM FEED



TOP END FEED



END CAP




300MM FLEXIBLE CONNECTOR





T FEED



NEON ARC | MOUNTING ACCESSORIES

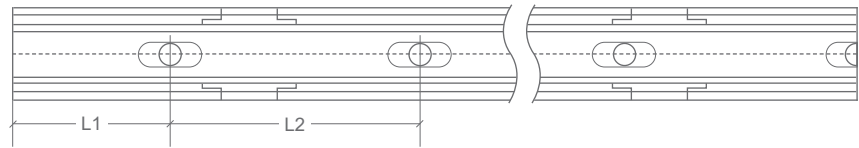




CODE	ACCESSORY	L1	L2	HOLE DIMENSIONS	HOLE NUMBER
BL-LS-4803	SELF-LOCKING ALUMINIUM PROFILE 2m	100mm	200mm	4 × 10mm	10
BL-LS-4804	PLASTIC PROFILE 2m	100mm	200mm	Ø3.5mm	10
BL-LS-4805	PLASTIC PROFILE 1m	100mm	200mm	Ø3.5mm	5
BL-LS-4813	BENDABLE STAINLESS STEEL PROFILE 890MM <i>MULTIPLE FIXING LOCATIONS</i>	-	-	-	-
BL-LS-4814	HYBRID PROFILE 2m	100mm	200mm	4 × 10mm	10
BL-LS-4817	SERRATED ALUMINIUM CLIP 20MM	10mm	-	4 × 10mm	1

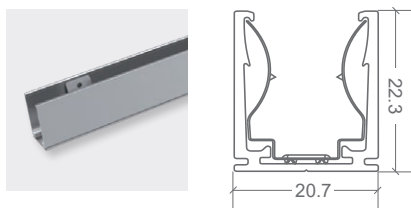



SELF-LOCKING ALUMINIUM PROFILE 2M

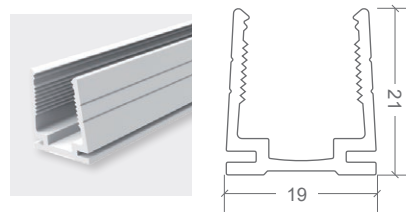



PLASTIC PROFILE

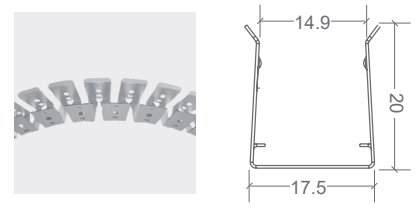

BENDABLE STAINLESS STEEL PROFILE 890MM

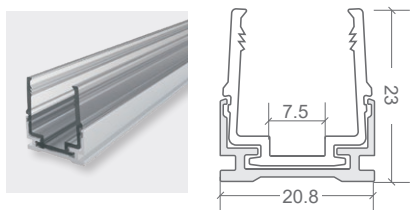

HYBRID PROFILE 2M

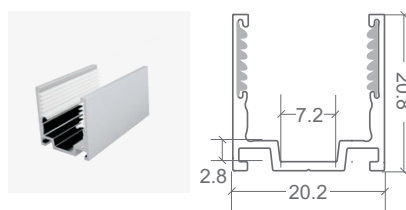

SERRATED ALUMINIUM 20MM MOUNTING CLIP