

## NEON CLASSIC | SILICONE | CONNECTIONS

Neon products are IP rated based on the fitted connections (power feed / end caps).

Bright Light recommend using Slimline injection moulding for the best result, a clean finish and IP68 rating. These are fitted at factory during the production process and can not be altered once produced - **ensure all lengths are double-checked before ordering.**

If on-site cutting is required (due to lengths being unknown in advance or site design alterations), Snap connector fittings can be used instead. Snap Connectors can be fitted on-site and offer an IP67 rating (provided all installation instructions are followed correctly).


Power feed connectors are priced & supplied with 1metre cable as standard. Please specific at time of quoting if alternate lengths are required.

### SLIMLINE INJECTION MOULDING CONNECTIONS | IP68

**RECOMMENDED**



REQUIRES FITTING AT FACTORY.  
EXACT LENGTH REQUIRED BEFORE PRODUCTION

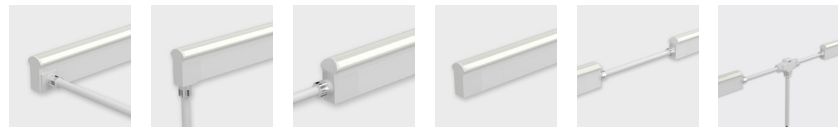

SIDE FEED      BOTTOM FEED      TOP END FEED      END CAP      300MM FLEXIBLE CONNECTOR      T FEED

AVAILABLE FOR ALL COLOUR TYPES



NOTE: FOR SAUNA MODEL SLIMLINE INJECTION MOULDING CONNECTOR ARE RATED FOR IP67

### SNAP CONNECTIONS | IP67

**ON-SITE FITTING**



FITTING ON-SITE - WHERE LENGTHS ARE UNKNOWN IN ADVANCE.  
MUST BE FITTED CORRECTLY FOR IP RATING



TOP END FEED      END CAP      300MM FLEXIBLE CONNECTOR

01      02      01      02

WHITE / DIM TO WARM	BL-LS-4514	BL-LS-4515	BL-LS-4526	BL-LS-4527	BL-LS-4516
TUNEABLE WHITE	BL-LS-4517	BL-LS-4518	BL-LS-4526	BL-LS-4527	BL-LS-4519
RGB	BL-LS-4520	BL-LS-4521	BL-LS-4526	BL-LS-4527	BL-LS-4522

NOTE: SNAP CONNECTORS ARE NOT AVAILABLE FOR RGB CHASING, RGBW OR SAUNA MODELS