

NEON EDGE | SILICONE | CONNECTIONS

Neon products are IP rated based on the fitted connections (power feed / end caps).

Bright Light recommend using Slimline injection moulding for the best result, a clean finish and IP68 rating. These are fitted at factory during the production process and can not be altered once produced - **ensure all lengths are double-checked before ordering.**

If on-site cutting is required (due to lengths being unknown in advance or site design alterations), Snap connector fittings can be used instead. Snap Connectors can be fitted on-site and offer an IP67 rating (provided all installation instructions are followed correctly).


Power feed connectors are priced & supplied with 1metre cable as standard. Please specific at time of quoting if alternate lengths are required.

SLIMLINE INJECTION MOULDING CONNECTIONS | IP68

RECOMMENDED



REQUIRES FITTING AT FACTORY.
EXACT LENGTH REQUIRED BEFORE PRODUCTION

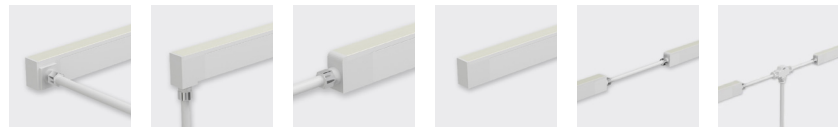

SIDE FEED BOTTOM FEED TOP END FEED END CAP 300MM FLEXIBLE CONNECTOR T FEED

AVAILABLE FOR ALL COLOUR TYPES



NOTE: FOR SAUNA MODEL SLIMLINE INJECTION MOULDING CONNECTOR ARE RATED FOR IP67

SNAP CONNECTIONS | IP67

ON-SITE FITTING



FITTING ON-SITE - WHERE LENGTHS ARE UNKNOWN IN ADVANCE.
MUST BE FITTED CORRECTLY FOR IP RATING



TOP END FEED END CAP 300MM FLEXIBLE CONNECTOR

01 02 01 02

WHITE / DIM TO WARM	BL-LS-4014	BL-LS-4015	BL-LS-4026	BL-LS-4027	BL-LS-4016
TUNEABLE WHITE	BL-LS-4017	BL-LS-4018	BL-LS-4026	BL-LS-4027	BL-LS-4019
RGB	BL-LS-4020	BL-LS-4021	BL-LS-4026	BL-LS-4027	BL-LS-4022

NOTE: SNAP CONNECTORS ARE NOT AVAILABLE FOR RGB CHASING, RGBW OR SAUNA MODELS