

PRO 30



FEATURES

- Consistent chip across the Pro range
- Onboard constant current
- 3oz 2 layer PCB
- 3M VHB tape

NOTE

- Aluminium profile as part of the installation is required for thermal management
- Not suitable for use with shallow profile models: Baseline 01 Mini, Lowline 01 Mini or Lowline 02 Mini

CRI ≥95
R9 80+
2-step MacAdam
ONE BIN ONLY
24V DC
IP20
.IES FILES
5 YEAR WARRANTY



CODE	INGRESS PROTECTION	COLOUR	LUMENS	EFFICACY	DIMENSIONS
PRO-30-27	Indoor use only	2700K +/- 60K	3250lm/m	108lm/W	W12 × H1.6mm
PRO-30-30	Indoor use only	3000K +/- 60K	3300lm/m	110lm/W	W12 × H1.6mm
PRO-30-40	Indoor use only	4000K +/- 60K	3350lm/m	112lm/W	W12 × H1.6mm

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10% AVAILABLE BY THE METRE OR BY 10 METRE REEL

LED WATTS	30W/m
INPUT VOLTS	24V DC
INPUT AMPS	1.25A/m
OPERATING TEMP.	-25°C ~ +60°C

CRI	≥95
R9	80+
SDCM	2-step MacAdam (non IP)
LED BRAND	Edison
BEAM ANGLE	115°
SOURCE LIFE	L80B10 82,000 hrs (Other parameters available on request)

LED PITCH	7.1mm
CUTTING LENGTH	50mm
LEDS PER METRE	140
CONTROL	Dimmable by PWM
MAX. RUN PER FEED	10 metres

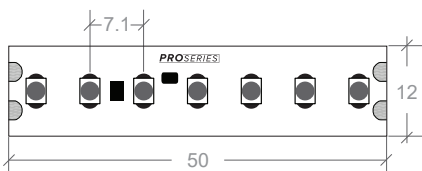

INDOOR USE ONLY