


MA-708

Portable Wireless PA System

Weighting under 17 kg and delivering a huge 170 watts of power, the 2-way MA-708 has set a new benchmark for performance and flexibility in Portable Public Address Systems.

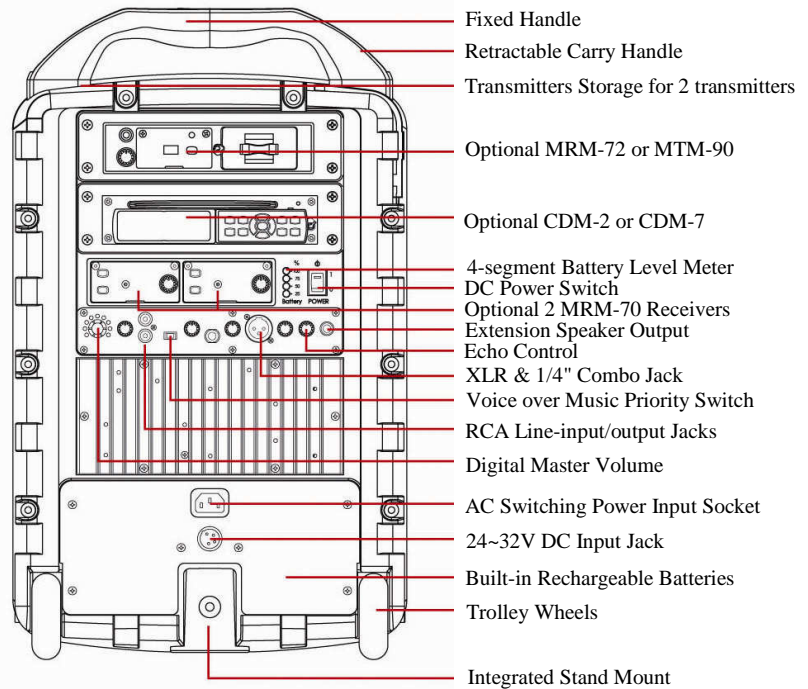

Ideal Applications

Ideal for medium to large-scale gatherings such as schools, places of worship, sporting events, corporate meetings, seminars & presentations, military, law enforcement events, fitness & aerobics centers, auctions, election campaigns, parks, theme parks.

Key Features

- Class D amplifier produces 170-watt audio output.
- 8" woofer & 1" titanium compression driver.
- 3 power modes: AC, rechargeable battery & DC jack.
- Up to 7 hours of operating time per charge.
- For crowds up to 1,000.
- Up to 4 optional diversity 16-channel receiver modules.
- AutoScan and ACT sync channel set-up technology.
- Interference warning indicator and control management.
- Optional CD/USB/SD Card player.
- Industry's only MTM-90 wireless interlinking option.
- Smart 4-segment rechargeable battery "fuel gauge" meter.
- Voice over music priority (VOP) & Echo effect features.
- Built-in two transmitters storage compartment.
- Line-input & output.

UHF Wireless

- **MRM-70** Single 16-ch Diversity Receiver Module
- **MRM-72** Dual 16-ch Diversity Receiver Modules
- **ACT-5H/ACT-5T** Handheld /Bodypack Transmitter Mics
- **MU-53L/55L** Uni/Omni-directional Lavalier Mics
- **MU-53HN/55HN** Dual-sided Uni/Omni-directional Headset
- **MU-210/23 (new)** Dual-sided Uni/Omni-directional Headset
- **MU-13 (new)** Single-sided Omni-directional Headset

Accessories

- **CDM-2** CD/USB player with remote control
- **CDM-7** CD/USB/SD Card Player & Recorder
- **MTM-90** Wireless Interlinking Transmitter
- **MB-70** Replacement Rechargeable Battery
- **MA-808EXP** Passive Expansion Speaker
- **MS-70** Tripod Speaker Stand
- **SC-80** Storage Bag

Technical Specifications

AF Power Output:	120W (rms) / 4Ω; 170W (max) / 4Ω
Frequency Response:	50Hz ~18KHz
Mic Input:	6.3mm / 1/4" & Combo Jack (XLR & 1/4")
Battery Type:	2 Rechargeable Gel Cells (MB-70) 12V/4.5AH (Included)
Operation Time:	6~7 hours per charge
Receiver Channels	UHF 16 auto-scanable frequencies
T.H.D.:	<0.1%
Treble Speaker	1" Titanium Compression Driver
Bass Speaker:	8" Neodymium Cone Driver
Line Input:	RCA jack
Line Output	RCA jack
Power Supply:	Built-in 12V/4.5AH rechargeable battery, charger & 100~240V AC switching power supply
Dimensions:	336(W) x 545(H) x 325(D)mm 13.2(W) x 21.5(H) x 12.8(D) "
Weight:	16.3 kg / 35.9 lbs (Loaded)
Color:	Black

Specifications subject to change without notice