


# MA-808

## Portable Wireless PA System

### MA-808 is MIPRO flagship portable

Weighting under 20 kg and delivering a huge 250 watts of power, the 2-way MA-808 has set a new benchmark for ultimate power & performance in Portable Public Address Systems.

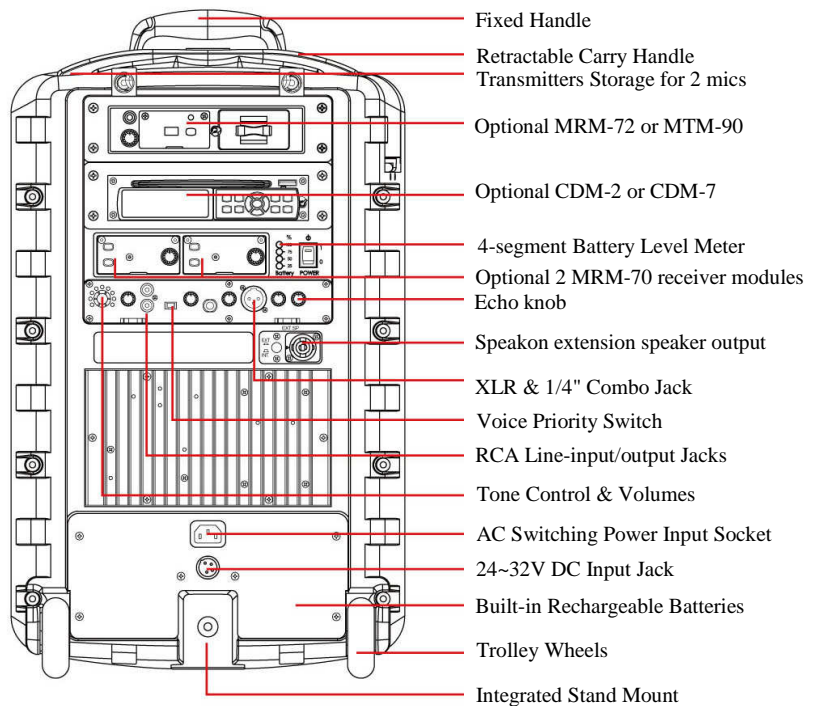

### Ideal Applications

Ideal for large-scale gatherings such as schools, places of worship, sporting events, corporate meetings, seminars & presentations, military, law enforcement events, fitness & aerobics centers, auctions, election campaigns, parks, theme parks.

### Key Features

- Class D amplifier produces 250-watt audio output.
- 10" woofer & 1.5" titanium compression driver.
- 3 power modes: AC, rechargeable battery & DC jack.
- Up to 6 hours of operating time per charge.
- For crowds up to 2,000.
- Up to 4 optional diversity 16-channel receiver modules.
- AutoScan and ACT sync channel set-up technology.
- Interference warning indicator and control management.
- Optional CD/USB/SD Card player.
- Industry's only MTM-90 wireless interlinking option.
- Smart 4-segment rechargeable battery "fuel gauge" meter.
- Voice over music priority (VOP) & Echo effect features.
- Built-in two transmitters storage compartment.
- Line-input & output.

### UHF Wireless

- **MRM-70** Single 16-ch Diversity Receiver Module
- **MRM-72** Dual 16-ch Diversity Receiver Modules
- **ACT-5H/ACT-5T** Handheld /Bodypack Transmitter Mics
- **MU-53L/55L** Uni/Omni-directional Lavalier Mics
- **MU-53HN/55HN** Dual-sided Uni/Omni-directional Headset
- **MU-210/23 (new)** Dual-sided Uni/Omni-directional Headset
- **MU-13 (new)** Single-sided Omni-directional Headset

### Accessories

- **CDM-2** CD player-pitch Control/USB Connector
- **CDM-7** CD/USB/SD Card Player & Recorder
- **MTM-90** Wireless Interlinking Transmitter
- **MB-70** Replacement Rechargeable Battery
- **MA-808EXP** Passive Expansion Speaker
- **MS-70** Tripod Speaker Stand
- **SC-80** Storage Bag

### Technical Specifications

AF Power Output:	180W (rms) / 4Ω; 250W (max) / 4Ω
Frequency Response:	50Hz ~18KHz
Mic Input:	6.3mm / 1/4" & Combo Jack (XLR & 1/4")
Battery Type:	2 Rechargeable Gel Cells (MB-70) 12V/4.5AH (Included)
Operation Time:	5~6 hours per charge
Receiver Channels	UHF 16 auto-scanable frequencies
T.H.D.:	< 0.1%
Treble Speaker	1.5" Titanium Compression Driver
Bass Speaker:	10" Neodymium Cone Driver
Line Input:	RCA jack
Line Output	RCA jack
Power Supply:	Built-in 12V/4.5AH rechargeable battery, charger & 100~240V AC switching power supply
Dimensions:	360(W) x 560(H) x 350(D)mm 14.2(W) x 22.0(H) x 13.8(D)"
Weight:	20 kg / 44 lbs (Loaded)
Color:	Black

Specifications subject to change without notice