



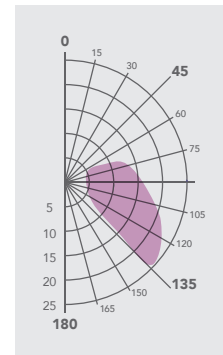



CODE O REACHER

- Commonly referred to as a Screecher
- True wind angle range of 65-130
- Designed as a versatile reaching sail
- To be used with an endless line furler to make handling easy

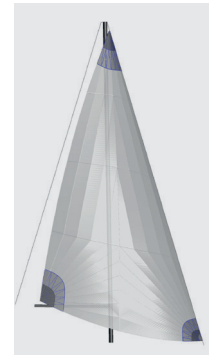



CODE C CRUISING

- All round short handed cruising sail
- True wind angle of 70-155
- Tight luff with integrated cable for fast reliable furling
- To be used with an endless line furler to make handling easy

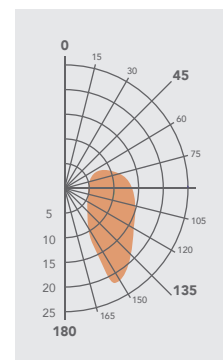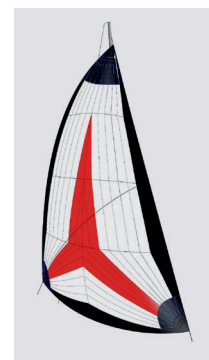



ASYMMETRICAL SPINNAKER

- Commonly referred to as a Gaennaker or MPS
- True wind angle range of 75-165
- Perfect for short handed downwind sailing
- Very versatile sail
- Can be used with a spinnaker sock or top down endless line furler

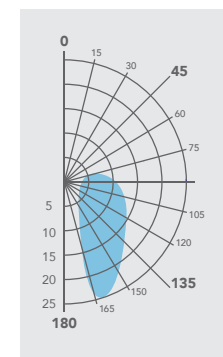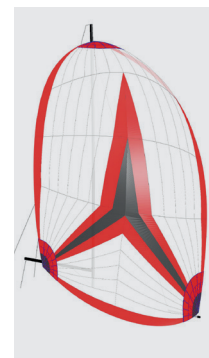

SYMMETRICAL SPINNAKER

- True wind angle range of 105-180
- Optimum way for most heavier displacement yachts to sail downwind
- Used with a spinnaker pole on monohulls
- Can be used with a spinnaker sock

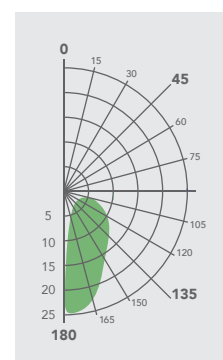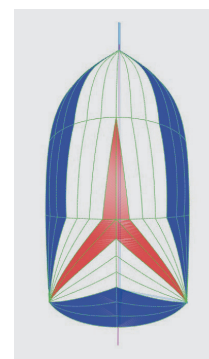

True Wind Speed (TWS) - True Wind Angle (TWA)