
# **SPECIFICATIONS**

# **MEASUREMENTS**

Lamps	LED4 x 320W	
Lumens	47,000ms	
Available power output	182 kw	
Generator	Brushless 60 Hz 3.1 kW,	
Engine	Kubota Diesel-Engine	
Receptades	One GFI duplex 20 A / 120 V	
Fuel capacity	45 gal (170 L)	
Wheelsize	13 in (33 cm)	
Axlerating	2,200lbs (997 kg)	
Tongue weight travel position	210 lbs (90 kg)	
Total weight no fuel	1,600 lbs (659 kg)	



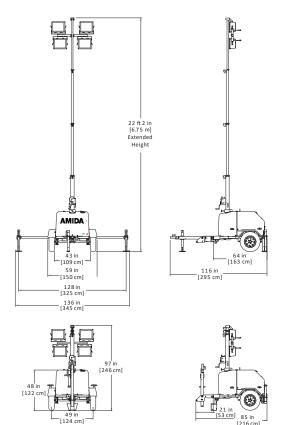

**APT4** LED3

## CHASSIS OPTIONS

AVIDA® branding and white paint Standard

Customer specific decals and Color options available

## **ENGINE OPTIONS**

3.1kW, 60 Hz generator with Kubota Diesel Engine

## **FEATURES**

Durable 23.4 ft / 7.13 m vertical mast with manual self braking winch, mast brake and 359 degree mast rotation for quick setup and light positioning

4x320w LED Lamps, Kubota Dieselengine, 45 gal / 170L fuel tank and 3.1kW generator provides 3 times run time of MH light tower

Efficient design layout allows up to 17 units per truckload, with fork pockets and lifting eye for quick loading and unloading

Heavy-Duty steel covers provides ample access for service and maintenance, with locking tabs for security

Platform to access lights and fold up tongue

Standard engine protection includes high water temperature and low oil auto shutdown

DOTapproved run, stop and turn lights,

## **TOWER OPTIONS**

Optional ElectricWinch

## **COLD WEATHER OPTIONS**

800 CCA battery

Low temperature coolant mix

Multiple hitch configurations

Engine block heater



**Built to Last** 





# **APT**4 LED3

# Specifications

Models	APT"4	
Measurements	US	Metric
▲Mast height	22.2 ft	6.75 m
▲ Inside track width	43 in	109 cm
▲Width - stowed	59 in	150 cm
	128 in	325 cm
▲Width - operating	136 in	345 cm
▲Length - to step	64 in	163 cm
▲Length - overall	116 in	295 cm
⚠ Height - cabinet	48 in	122 cm
Height - stowed	97 in	246 cm
▲Track width	49 in	124 cm
▲Tongue length - stowed	21 in	53 cm
▲Length - stowed	85 in	216 cm
Fuel capacity	45 gal	170 L
Wheel size	13 in	33 cm
Axle rating	2,200 lbs	998 kg
Machine weight no fuel	1,600 lbs	726 kg
Tongue weight travel position	210 lbs	95.3 kg

## **Dimensions**

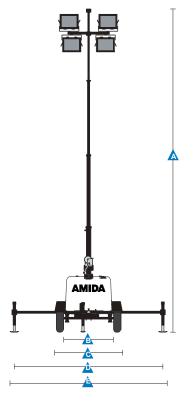

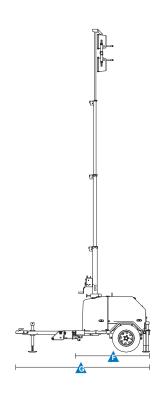









# **APT4** LED3

# **Features**

#### Standard Features

#### Measurements

- LED panels4 x 320W
- · Brushless 60 Hz, 3.` kW Generator
- · Kubota Diesel Engine
- One GFI duplex 20 A / 120 V Receptacles
- · 45 gal (170 L) Fuel capacity
- 13 in (33 cm) Wheel size
- 2,200 lbs (998 kg) Axle rating
- 203 lbs (92 kg) Tongue weight travel position
- 1,600 lbs (726 kg) Total weight no fuel

### Productivity

- Durable 23.4 ft / 7.13 m vertical mast with manual self braking winch, mast brake and 359 degree mast rotation for quick setup and light positioning
- 4x320W square LED lamps, Kubota Diesel Engine, 45 gal / 170 L fuel tank and 3.1kW generator provide up to 3 times hours of run time over MH bulbs
- Efficient design layout allows up to 17 units per truckload, with fork pockets and lifting eye for quick loading and unloading
- Heavy-Duty steel covers provides ample access for service and maintenance, with locking tabs for security
- Platform to access lights and fold up tongue for transport
- Standard engine protection includes high water temperature and low oil auto shutdown
- DOT approved run, stop and turn lights, standard

## Options & Accessories

## Chassis Options

- · AMIDA branding and white paint
- Customer specific decals and Co options available
- · Multiple hitch configuration

### **Engine Options**

- 3.1 kW, 60 Hz generator with Kubota<sup>®</sup> diesel
- One GFI duplex 20 A / 120 V Receptacles

#### **Tower Options**

Electric Winch

## **Cold Weather Options**

- 800 CCA battery
- · Low temperature coolant mix
- · Engine block heater



### **Amida**

132 Grayson Road Rock Hill, South Carolina 29732 Telephone +1 (803) 328-1134 Fax +1 (901) 948-3006 Distributed By:

Effective Date: December, 2021. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Eagle Lighting and/or their subsidiaries in the USA and many other countries.