


## STRAP CONSTRUCTION

1. Draw a line down the center of the strap on the wrong side of the fabric.
  - a. If using vinyl, place double-sided tape along the left and right sides of the line drawn.
  - b. If using cotton fold the short raw edges in by 1/2" (38mm) and press with an iron (not pictured)

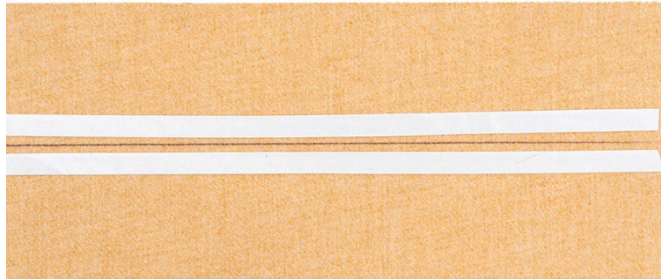


2. Fold long raw edges in towards the center meeting the edge with the line drawn. Repeat for both sides.
  - a. If using vinyl, the double-sided tape will secure in place.
  - b. If using quilting cotton press with an iron.

Next, fold strap in half and clip in place.



3. Sew down the left and right sides of the strap with a 1/8" (3mm) seam allowance.

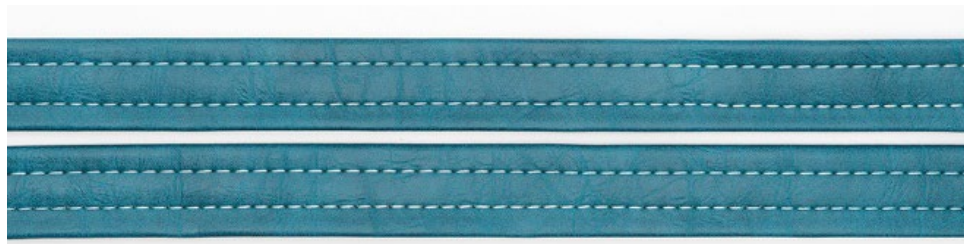

## ATTACHING CROSSBODY STRAP HARDWARE

1. Insert one end of the strap into your strap slider. Fold over the center bar about 1-1.5" (2.5 – 4 cm). Clip in place.



4. Then feed through the right side of the strap slider.



2. Add your swivel clasps, as pictured.



3. Feed the opposite end of the strap back through the left side of the strap slider.



5. Add remaining swivel clasps to opposite end of strap. Fold over about 1-1.5" (2.5 – 4 cm). Clip in place.





6. Add rivets to folded over edges or sew to secure in place.



## STRAP CONNECTORS

1. Draw a line down the center of the strap on the wrong side of the fabric.
  - a. If using vinyl, place double-sided tape along the left and right sides of the line drawn.
2. Fold long raw edges in towards the center meeting the edge with the line drawn. Repeat for both sides.
  - a. If using vinyl, the double-sided tape will secure in place.
  - b. If using quilting cotton press with an iron.
3. Add hardware (D-Rings, O-Rings, Rectangle Rings). Fold strap connector in half. Clip in place. Sew with a 1/8" (3mm) SA.

