



POLYESTER PLEATED CARTRIDGES

SPX SERIES

SPX SERIES - 2.75" FLOW RATES							
Microns	2.75" x 9.875"	2.75" x 19.5"	2.75" x 20"	2.75" x 29.25"	2.75" x 30"	2.75" x 39"	2.75" x 40"
1	4	8	8	25	25	25	25
5	7	14	14	25	25	25	25
10	7	14	14	25	25	25	25
20	8	16	16	25	25	25	25
30	8	16	16	25	25	25	25
50	10	20	20	30	30	40	40
100	12	24	24	35	35	46	46

SPX SERIES - 4.5" FLOW RATES		
Microns	4.5" x 9.875"	4.5" x 20"
1	15	30
5	20	40
10	20	40
20	20	40
30	20	40
50	20	40
100	25	50

Flow Rates in gpm.

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

FEATURES

- Manufactured from durable Polyester.
- Bacteria and chemical resistant.
- Washable and reusable.
- NSF/ANSI/CAN 61 & 372 certified.
- Made with FDA CFR 21 approved material.
- FDA / USP Material Safety Compliance - All materials comply with FDA requirements for food and beverage contact per CFR Title 21 174.5, 177.1520 and 177.1630. All components meet USP Class VI Plastics.

OPERATIONAL DATA

Temperature Range: 40 °F to 125 °F (4.4 °C to 51.7 °C)


MATERIALS OF CONSTRUCTION

Filter Media: Non-woven Polyester
 End Caps: Vinyl Plastisol
 Core: Polypropylene


RECOMMENDED CHANGEOUT

Differential Pressure: 30 psid (2.07 bar)

SPX Performance

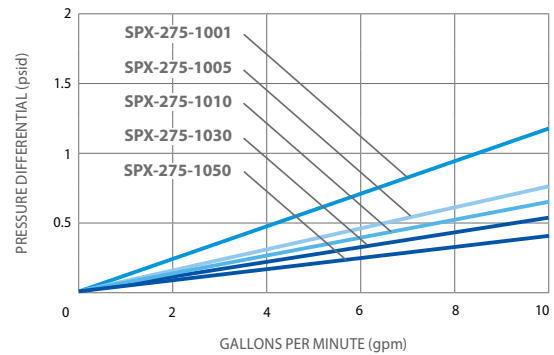

SPX Performance

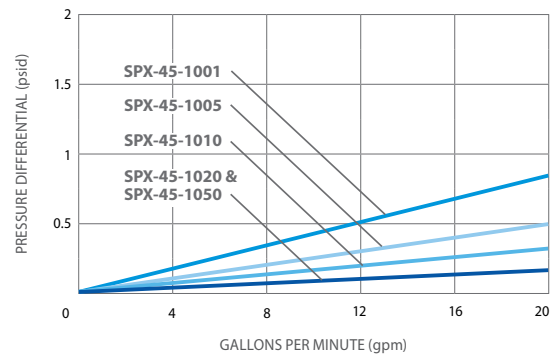

MODEL # GUIDE

Polyester Pleated Cartridge Length Retention Rating

SPX-45-10-0.2A

Outside Diameter Micron

LEGEND

Outside Diameter: 275 = 2.75" 45 = 4.5"	Micron: 0.2 = 0.2 Micron 0.35 = 0.35 Micron	Retention Rating: A = Absolute
Length: 10 = 9.875" 19 = 19.5" 20 = 20" 292 = 29.25" 30 = 30" 39 = 39" 40 = 40"	01 = 1 Micron 05 = 5 Micron 10 = 10 Micron 20 = 20 Micron 30 = 30 Micron 50 = 50 Micron 100 = 100 Micron	

Copyright © 2023 - 2024 HydroScientific, All Rights Reserved.