

ABOUT

Caterpillar pendant light with diffused and direct light. Diffuser consisting of a paper tape coupled with a thin layer of technopolymer wrapped in an apparently casual manner around the frame. Epoxy powder coated metal mount, satin finish extruded PMMA diffuser housing the light source. Two stainless steel suspension cables with satin finish steel mechanical ceiling attachment and transparent electrical cable.

LEAD TIME

4 - 7 weeks

LIGHT SOURCE

Integrated LED,

Warm White (2700K to 3300K),

Cool White (3300K to 5300K),

Not dimmable

INSTALLATION

Ceiling mount

Supplied with external driver.

ROD LENGTH

Black Braided Cable, Length 150cm / 59".

PRODUCT SIZE

Dia 150cm x H 35cm Dia 150cm x H 55cm

FITTING FINISHES

White

SHADE COLOURS

White Materials


PVC (polyvinyl chloride), Metal

CERTIFICATION CE/CCC/UL/SAA/KC

WARRANTY

3 years Voltage AC 110-240V

WEIGHT 3kg

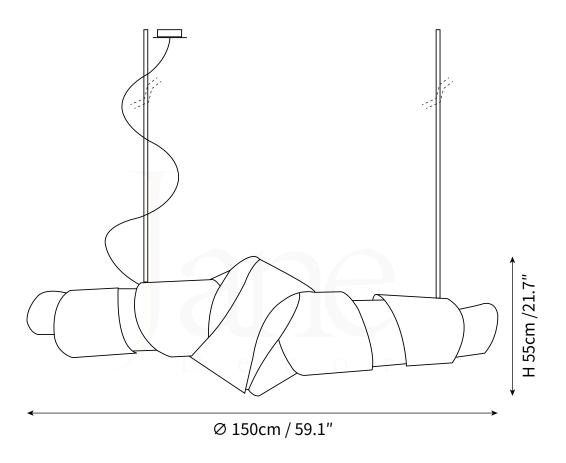

ABOUT

Caterpillar pendant light with diffused and direct light. Diffuser consisting of a paper tape coupled with a thin layer of technopolymer wrapped in an apparently casual manner around the frame. Epoxy powder coated metal mount, satin finish extruded PMMA diffuser housing the light source. Two stainless steel suspension cables with satin finish steel mechanical ceiling attachment and transparent electrical cable.

LEAD TIME

4 - 7 weeks

LIGHT SOURCE

Integrated LED,

Warm White (2700K to 3300K),

Cool White (3300K to 5300K),

Not dimmable

INSTALLATION

Ceiling mount

Supplied with external driver.

ROD LENGTH

Black Braided Cable, Length 150cm / 59".

PRODUCT SIZE

Dia 150cm x H 35cm Dia 150cm x H 55cm

FITTING FINISHES

White

SHADE COLOURS

White Materials

PVC (polyvinyl chloride), Metal

CERTIFICATION CE/CCC/UL/SAA/KC

WARRANTY

3 years Voltage AC 110-240V

WEIGHT

3kg