


NANO SUSPENSION LIGHT  
PENDANT


SPECIFICATION SHEET  
INTERNATIONAL

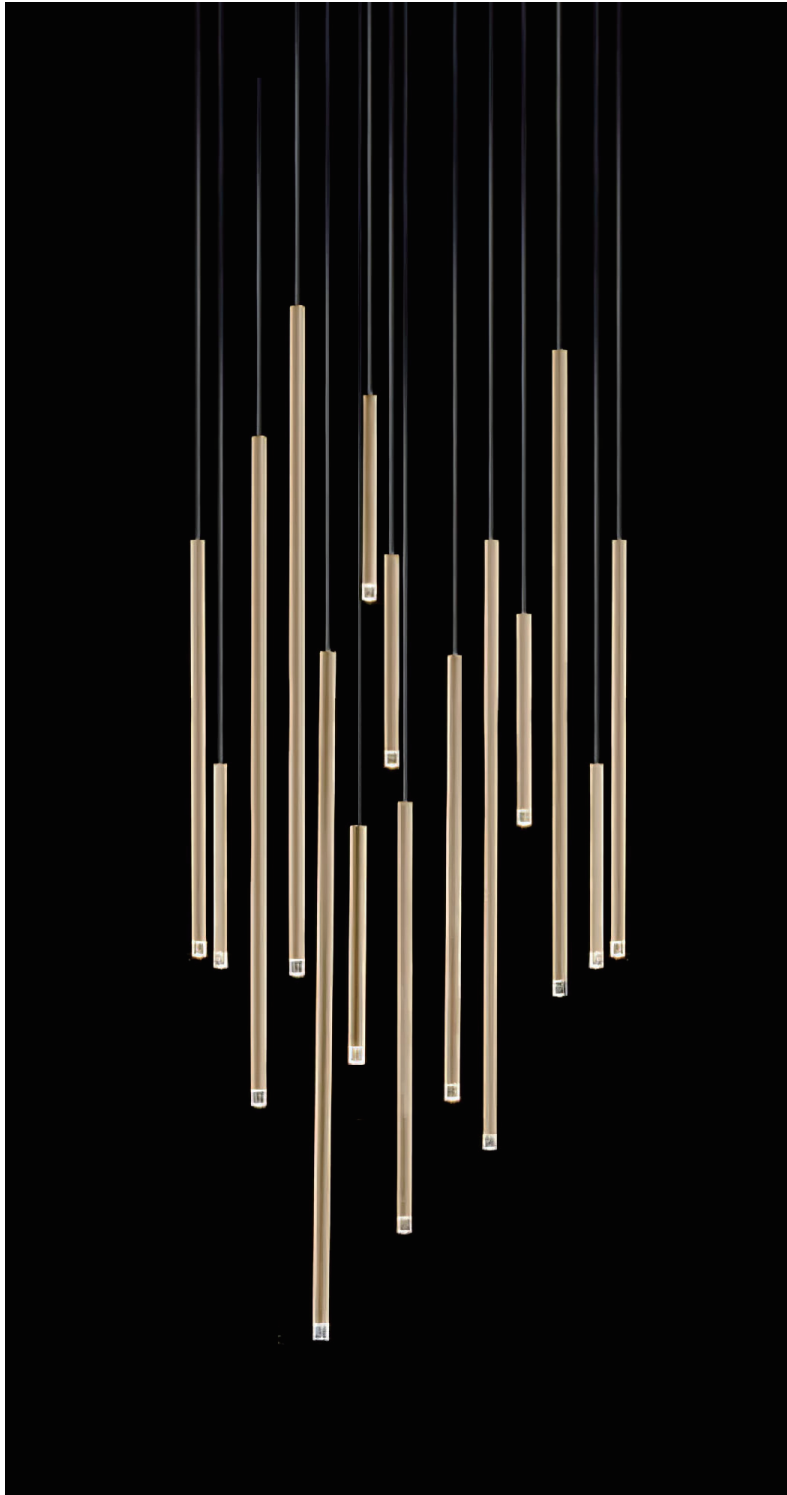

# NANO SUSPENSION LIGHT

PENDANT

SPECIFICATION SHEET  
INTERNATIONAL

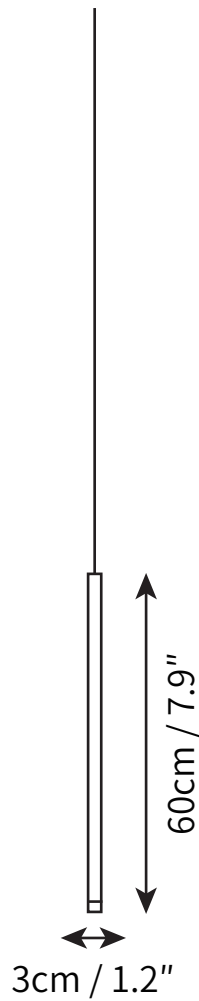

## ABOUT

Nano is a suspension light which interprets light in its simplest form by creating a thin luminous line in the living spaces. At the lower end of the lightweight iron structure, a transparent methacrylate diffuser houses an LED module whose light creates a soft, welcoming atmosphere.

## LEAD TIME

4 - 7 weeks

## LIGHT SOURCE

Integrated LED,  
Warm White (2700K to 3300K),  
Cool White (3300K to 5300K),  
Not dimmable

## INSTALLATION

Ceiling mount  
Supplied with external driver.

## FLEX CORD COLOURS

Black Braided Cable,  
Length 150cm / 59".

## PRODUCT SIZE

Dia 3cm x H 30cm

## FITTING FINISHES

Gold

## SHADE COLOURS

Gold

## CERTIFICATION

CE/CCC/UL/SAA/KC

## WARRANTY

3 years

## Materials

Iron, Metal, PMMA

## Voltage

AC 110-240V


## WEIGHT

1kg

# NANO SUSPENSION LIGHT

PENDANT

SPECIFICATION SHEET  
INTERNATIONAL

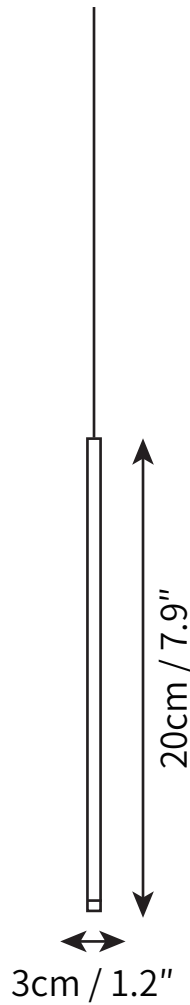

## ABOUT

Nano is a suspension light which interprets light in its simplest form by creating a thin luminous line in the living spaces. At the lower end of the lightweight iron structure, a transparent methacrylate diffuser houses an LED module whose light creates a soft, welcoming atmosphere.

## LEAD TIME

4 - 7 weeks

## LIGHT SOURCE

Integrated LED,  
Warm White (2700K to 3300K),  
Cool White (3300K to 5300K),  
Not dimmable

## INSTALLATION

Ceiling mount  
Supplied with external driver.

## FLEX CORD COLOURS

Black Braided Cable,  
Length 150cm / 59".

## PRODUCT SIZE

Dia 3cm x H 60cm

## FITTING FINISHES

Gold

## SHADE COLOURS

Gold

## CERTIFICATION

CE/CCC/UL/SAA/KC

## WARRANTY

3 years

## Materials

Iron, Metal, PMMA

## Voltage


AC 110-240V

## WEIGHT

1kg

# NANO SUSPENSION LIGHT PENDANT

SPECIFICATION SHEET  
INTERNATIONAL

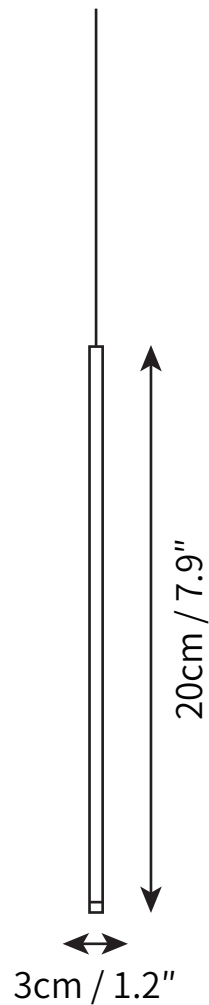

## ABOUT

Nano is a suspension light which interprets light in its simplest form by creating a thin luminous line in the living spaces. At the lower end of the lightweight iron structure, a transparent methacrylate diffuser houses an LED module whose light creates a soft, welcoming atmosphere.

## LEAD TIME

4 - 7 weeks

## LIGHT SOURCE

Integrated LED,  
Warm White (2700K to 3300K),  
Cool White (3300K to 5300K),  
Not dimmable

## INSTALLATION

Ceiling mount  
Supplied with external driver.

## FLEX CORD COLOURS

Black Braided Cable,  
Length 150cm / 59".

## PRODUCT SIZE

Dia 3cm x H 90cm

## FITTING FINISHES

Gold

## SHADE COLOURS

Gold

## CERTIFICATION

CE/CCC/UL/SAA/KC

## WARRANTY

3 years

## MATERIALS

Iron, Metal, PMMA

## VOLTAGE

AC 110-240V

## WEIGHT

1kg