
# **Latch Type Toggle Clamps**

Steel, with Locking Mechanism







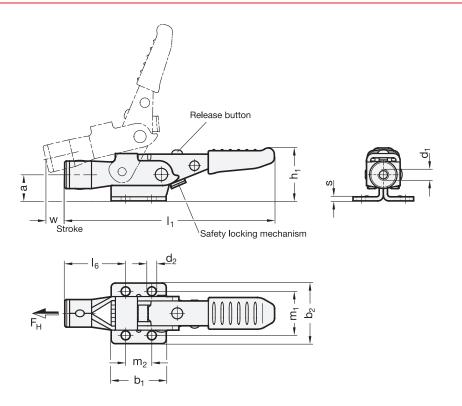

- T5 Without latch bolt, without catch
- TG With oval head latch bolt, with catch
- TT With T-head latch bolt, with catch
- TU With J hook latch bolt, with catch

## Metric table

Ū

Dimensions in: millimeters - inches

Size	F <sub>H</sub> Holding capacity	a	b <sub>1</sub>	b <sub>2</sub>	b <sub>3</sub>	b <sub>4</sub>	<b>b</b> <sub>5</sub>	b <sub>6</sub>	<b>b</b> <sub>7</sub>	d <sub>1</sub> Thread	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	<b>d</b> <sub>5</sub>	h <sub>1</sub> ≈
160	1750 N 393 lbf	13 .51	26 1.02	28 1.10	23 .91	14 .55	26 1.02	35 1.38	6.8 .27	M 6	4.5 .18	4.5 .18	5.2 .20	6 .24	27 1.06
320	4000 N 899 lbf	19 .75	40 1.57	44 1.73	34 1.34	18 .71	35 1.38	38 1.50	10 .39	M 8	6.7 .26	6.7 .26	7 .28	8 .31	38.5 1.52
700	7500 N 1686 lbf	28 1.10	60 2.36	54 2.13	41 1.61	26 1.02	50 1.97	50 1.97	11 .43	M 10	8.5 .33	8.5 .33	9 .35	10 .39	53 2.09

Size	h <sub>2</sub>	h <sub>3</sub>	I₁ ≈	<b>I<sub>2</sub> ≈</b> Type TG	l <sub>3</sub> ≈ Type TT	I₄ ≈ Type TU	I <sub>5</sub>	I <sub>6</sub>	m <sub>1</sub>	m <sub>2</sub>	m <sub>3</sub>	m <sub>4</sub>	m <sub>5</sub>	s	<b>w</b> Stroke
160	20 .79	20.5	103 <i>4.06</i>	55 2.17	55 2.17	54 2.13	28 1.10	30 1.18	19 .75	16 .63	16 .63	14.3 .56	25.4 1.00	2	8 .31
320	30 1.18	28 1.10	153 <i>6.02</i>	76.5 3.01	76.5 3.01	76.5 3.01	34 1.34	44.5 1.75	32 1.26	19 .75	19 .75	22.3 .88	25.4 1.00	3 .12	13 .51
700	40.5 1.59	39 1.54	222 8.74	95.5 <i>3.7</i> 6	93 <i>3.</i> 66	92 <i>3.62</i>	42 1.65	51 2.01	38 1.50	41.5 1.63	31 1.22	25.4 1.00	31 1.22	3.5 .14	19 .75

## **Specification**

- Base, clamping lever and catch Steel
  Case-hardened steel C10
  Blackened finish
- Latch bolt Steel St 32
  Blackened finish
- All moving parts lubricated with special grease
- Hand grip High quality, oil resistant, red plastic
- RoHS compliant

#### Information

The GN 853 latch type toggle clamp also features a push-button locking mechanism which prevents an inadvertent or vibration-induced opening of the clamp.

Another benefit is the ability to operate the clamp with one hand. The latch bolt can be adjusted within the range of dimension  $w_2$ . The design of Type T5 (thread bore  $d_1 = M8$ ) allows the easy and individual configuration of the locking mechanism.

#### see also...


• Latch Type Toggle Clamps GN 853 (Stainless Steel)


How to order	1	Size
GN 853-320-TT	2	Туре







Type **TG** Oval head latch bolt







Type **TT** T-head latch bolt






Type **TU** J-hook latch bolt





# Description of function (for one-hand operation)



Press the release button for releasing.



Lift the clamping arm until the latch bolt disengages from the catch.



Retracting the clamping arm will lift the latch bolt and release the catch (one-hand operation).



For **clamping operation**, lift the clamping arm until it rests on the catch.



The clamping arm engages in the catch if the release button is pressed for the clamping operation

When clamping in the end position, the system locks automatically by spring force.