




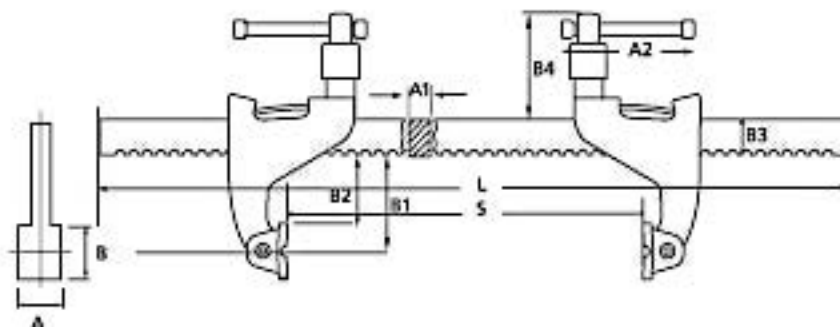


# Bar Clamps

For tough jobs in engineering including

- Fabrication
- Welding
- Machining
- Maintenance
- Toolroom



1 daN = 1 kgf  
1 daN = 2.2 lbf  
1 daN = 10 N

	Model No.	Capacity (S)		Reach (B1)		Weight kg	Measurements in mm							
		mm	Inch	mm	Inch		A	A1	A2	B	B2	B3	B4	L
<b>Standard Duty</b>  1130 daN	T186-600	600	(24)	60	(2 1/2)	3.4	25	12	76	32	44	30	76	710
	T186-900	900	(36)	60	(2 1/2)	4.4	25	12	76	32	44	30	76	1020
	T186-1500	1500	(60)	60	(2 1/2)	5.8	25	12	76	32	44	30	76	1625
	T186-2100	2100	(84)	60	(2 1/2)	7.6	25	12	76	32	44	30	76	2235
	T186-2400	2400	(96)	60	(2 1/2)	8.8	25	12	76	32	44	30	76	2540
<b>Standard Duty Long Reach</b>  565 daN	T321-600	600	(24)	120	(4 1/2)	3.5	25	12	76	32	104	30	76	710
	T321-900	900	(36)	120	(4 1/2)	4.5	25	12	76	32	104	30	76	1020
	T321-1500	1500	(60)	120	(4 1/2)	5.9	25	12	76	32	104	30	76	1625
	T321-2100	2100	(84)	120	(4 1/2)	7.7	25	12	76	32	104	30	76	2235
	T321-2400	2400	(96)	120	(4 1/2)	8.9	25	12	76	32	104	30	76	2540
<b>Medium Duty</b>  1600 daN	T290-900	900	(36)	90	(3 1/2)	10.5	38	20	140	51	65	40	105	1070
	T290-1200	1200	(48)	90	(3 1/2)	12.1	38	20	140	51	65	40	105	1390
	T290-1500	1500	(60)	90	(3 1/2)	14.0	38	20	140	51	65	40	105	1690
	T290-2100	2100	(84)	90	(3 1/2)	18.0	38	20	140	51	65	40	105	2290
<b>Medium Duty Long Reach</b>  950 daN	T285-900	900	(36)	200	(8)	11.5	38	20	140	51	180	40	105	1070
	T285-1200	1200	(48)	200	(8)	13.0	38	20	140	51	180	40	105	1390
	T285-1500	1500	(60)	200	(8)	15.0	38	20	140	51	180	40	105	1690
	T285-2100	2100	(84)	200	(8)	19.0	38	20	140	51	180	40	105	2290
<b>Heavy Duty</b>  2700 daN	T257-2100	2100	(84)	115	(4 1/2)	27.2	51	22	187	63,5	83	52	127	2335
	T257-2700	2700	(108)	115	(4 1/2)	32.0	51	22	187	63,5	83	52	127	2945