

## Spring Plungers with pin and internal hexagon 22030.0152

### Product Description

Spring plungers can be used for locating or for applying pressure, as a detent or for ejection.



#### Material

##### Pin

- Free cutting steel, hardened, blackened

##### Body


- Free cutting steel, blackened

##### Spring

- Stainless steel

#### Characteristic

Reinforced spring load: marked with two lines



Standard spring load



Heavy spring load

#### More information


#### Notes

Special types on request.  
Spring range and forces are precisely tested.

#### References

Thread lock on request, please refer to appendix - Technical Data -

### Drawing

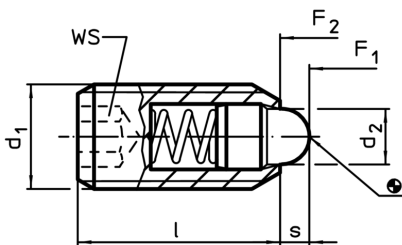

### Order information

Dimensions			WS [mm]	Stroke s [mm]	Spring load <sup>1)</sup>		max. [°C]	[g]	Art. No.
d <sub>1</sub>	d <sub>2</sub>	l			F <sub>1</sub> ~	F <sub>2</sub> ~			
[mm]			[mm]	[mm]	[N]		[°C]	[g]	
<b>free cutting steel, heavy spring load</b>									
M12	6,2	26	6	3,5	38	96	250	13	22030.0152

<sup>1)</sup> statistical average value

Application example

