

## Spring Plungers· plastic

22040.0406

### Product Description

Spring plungers can be used for locating or for applying pressure, as a detent or for ejection.



#### Material

##### Body

- Thermoplastic POM, blue

##### Ball

- Thermoplastic POM, white

##### Spring

- Stainless steel

#### More information


##### Notes

Special types on request.  
Spring range and forces are precisely tested.

##### References

Thread lock on request, please refer to appendix - Technical Data - Calculation of indexing resistance, see details at the start of the section.

### Drawing

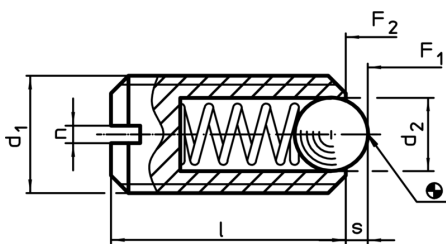

### Order information

Dimensions				Stroke s [mm]	Spring load <sup>1)</sup>		Temperature		Weight [g]	Art. No.
d <sub>1</sub>	d <sub>2</sub>	l	n		F <sub>1</sub> ~ [N]	F <sub>2</sub> ~ [N]	min.	max.		
ball from thermoplastic										
M6	3,5	14	1	0,9	12	17	-30	50	0,5	22040.0406

<sup>1)</sup> statistical average value

### Application example

