

Spring Plungers with pin and slot 22050.0104

Product Description

Spring plungers can be used for locating or for applying pressure, as a detent or for ejection.



Material

Pin

- Free cutting steel, hardened, blackened

Body


- Free cutting steel, blackened

Spring

- Stainless steel

Characteristic

Standard spring load: no marking



Standard spring load

Heavy spring load

More information


Notes

Special types on request.
Spring range and forces are precisely tested.

References

Thread lock on request, please refer to appendix - Technical Data -

Drawing

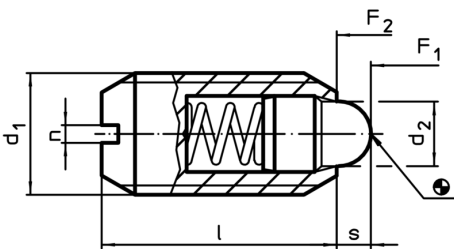

Order information

Dimensions				Stroke s [mm]	Spring load ¹⁾		max. [°C]	[g]	Art. No.
d ₁	d ₂	l	n		F ₁ ~ [N]	F ₂ ~			
free cutting steel, standard spring load									
M4	1,8	9	0,6	1,5	4,5	12,5	250	0,4	22050.0104

¹⁾ statistical average value

Application example

