

Spring Plungers with pin and slot 22050.0508

Product Description

Spring plungers can be used for locating or for applying pressure, as a detent or for ejection.



Material

Pin

- Stainless steel 1.4305

Body



- Stainless steel 1.4305

Spring

- Stainless steel

Characteristic

Standard spring load: no marking



Standard spring load

Heavy spring load

More information

Notes


Special types on request.

Spring range and forces are precisely tested.

References

Thread lock on request, please refer to appendix - Technical Data -

Drawing

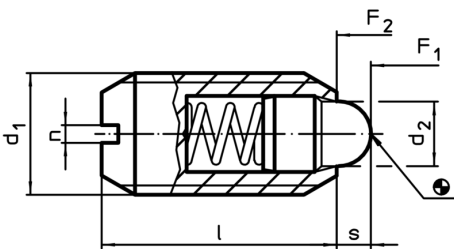

Order information

Dimensions				Stroke s [mm]	Spring load ¹⁾		max. [°C]	[g]	Art. No.
d ₁	d ₂	l	n		F ₁ ~ [N]	F ₂ ~ [N]			
stainless steel, standard spring load									
M8	3,8	16	1,2	2	16	33	250	3,9	22050.0508

¹⁾ statistical average value

Application example

