

## Spring Plungers with pin and slot

22050.0724

### Product Description

Spring plungers can be used for locating or for applying pressure, as a detent or for ejection.



#### Material

##### Pin

- Stainless steel 1.4305

##### Body


- Stainless steel 1.4305

##### Spring

- Stainless steel

#### Characteristic

Reinforced spring load: marked with two lines



Standard spring load

Heavy spring load

#### More information


#### Notes

Special types on request.  
Spring range and forces are precisely tested.

#### References

Thread lock on request, please refer to appendix - Technical Data -

### Drawing

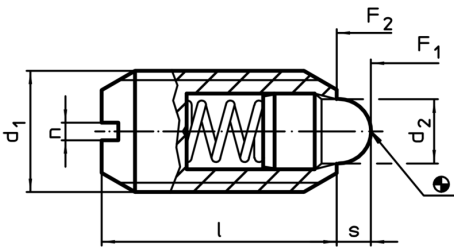

### Order information

Dimensions				Stroke s [mm]	Spring load <sup>1)</sup>		max. [°C]	[g]	Art. No.
d <sub>1</sub>	d <sub>2</sub>	l	n		F <sub>1</sub> ~ [N]	F <sub>2</sub> ~ [N]			
stainless steel, heavy spring load									
M24	13	34	3	8	91	223	250	75	22050.0724

<sup>1)</sup> statistical average value

Application example

