

## Spring Plungers with internal hexagon

### 22060.0008

#### Product Description

Spring plungers can be used for locating or for applying pressure, as a detent or for ejection.



#### Material

##### Pin

- Free cutting steel, hardened, blackened

##### Body

- Free cutting steel, blackened

##### Spring


- Stainless steel

#### Assembly


Spring plungers can be mounted and removed by means of the slot or internal hexagon. Please use a special assembly tool for mounting with a slot (pin side).

#### Characteristic

Standard spring load: no marking



Standard spring load



Heavy spring load

#### More information

#### Notes

Special types on request.  
Spring range and forces are precisely tested.


#### References

Thread lock on request, please refer to appendix - Technical Data -

#### Further products

- Spring Plungers, with internal hexagon and seal

#### Drawing

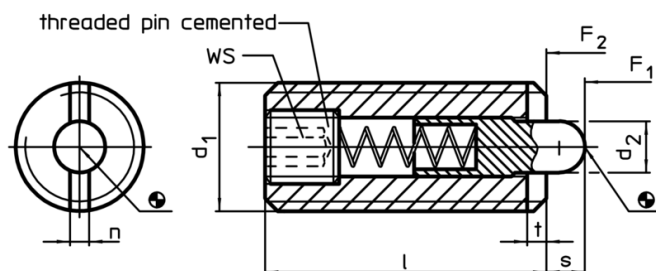

#### Order information

Dimensions					WS	Stroke s	Spring load <sup>1)</sup>		max. [°C]	[g]	Art. No.
d <sub>1</sub>	d <sub>2</sub>	l	n	t			F <sub>1</sub> ~	F <sub>2</sub> ~			
free cutting steel, standard spring load											
M8	3,5	22	1,5	1,4	2,5	3	10	39	250	5,8	22060.0008

<sup>1)</sup> statistical average value

#### Accessories

Dimensions d <sub>1</sub> [mm]	[g]	Art. No.
Assembly tool for mounting via slot (pin sided)		
M 8	108	22060.0808

Application example

