

## Spring Plungers· smooth, with collar and pin

22080.0126

### Product Description

To be used for locating, tightening, as an assembly support, for applying pressure, as a detent, for ejection or as a shock absorber.

### Material

**Pin**  
• Thermoplastic POM, white

**Body**  
• Stainless steel 1.4303

**Spring**  
• Stainless steel

### Assembly

A tolerance of H7 is recommended for the locating hole of  $d_1$ .


### More information

### Notes

Special types on request.  
Spring range and forces are precisely tested.



### Drawing

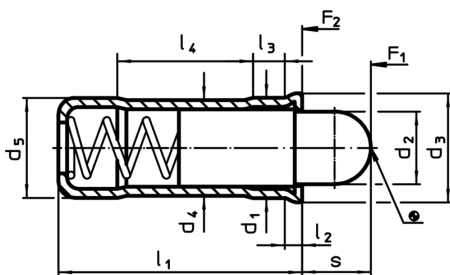

### Order information

Dimensions										Stroke s [mm]	Spring load <sup>1)</sup> F <sub>1</sub>   F <sub>2</sub> ~   ~ [N]		Temperature min.   max. [°C]		Location hole H7 [mm]	Weight [g]	Art. No.
d <sub>1</sub> +0,1 +0,04	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub> ±0,04	l <sub>1</sub>	l <sub>2</sub> ~	l <sub>3</sub> ~	l <sub>4</sub> ~	[mm]		[N]	[N]	[°C]	[°C]			
stainless steel body, thermoplastic pin																	
6	4,8	6,5	5,85	6	15	1	2,3	8,2	5,5	6,1	12	-30	50	6	1,3	22080.0126	

<sup>1)</sup> statistical average value

### Application example

