

**Thrust Pads· DIN 6311 and low model**  
22560.0020**Product Description**

Combinable with grub screws DIN 6332 with thrust point EH 22540.

**Material**

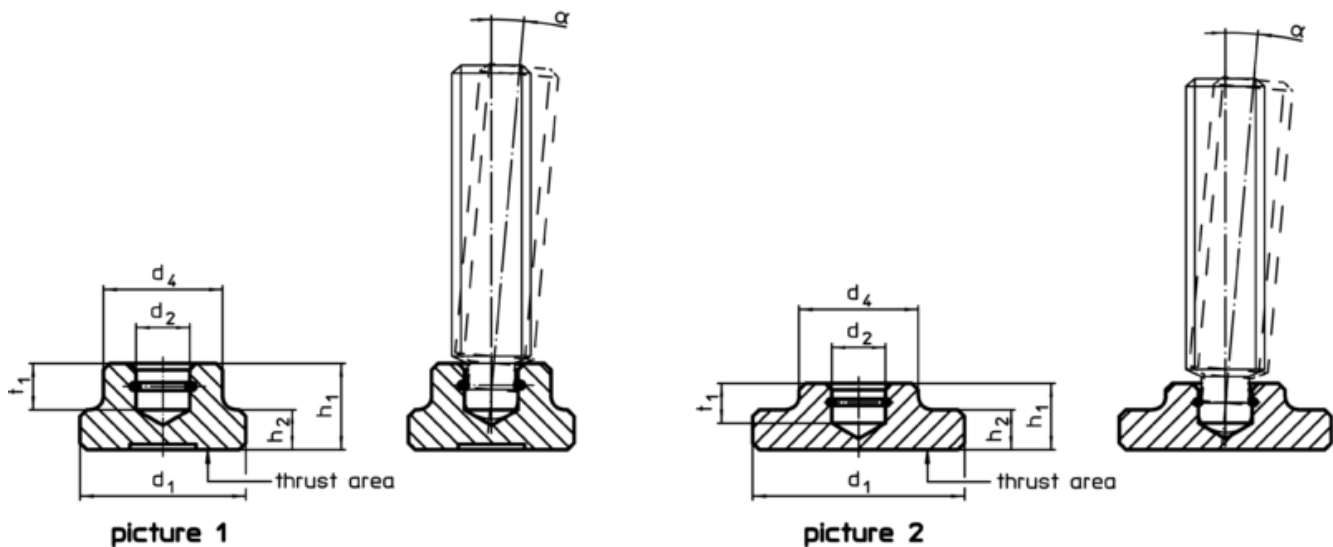
- Steel, case-hardened, blackened. Snap ring inlaid.


**Assembly**

The thrust pad is to be held the way the spring retainer lies in the recess with its open side at the bottom. The grub screw is inclined as far as possible in the direction of the open side of the ring and pressed in.

**More information****Further products**

- Grub Screws, DIN 6332 with thrust point

**Drawing****Order information**

Dimensions						For grub screws with thrust point DIN 6332	α min.		Art. No.
d <sub>1</sub>	d <sub>2</sub> H12	d <sub>4</sub>	h <sub>1</sub>	h <sub>2</sub>	t <sub>1</sub>				
[mm]									
DIN 6311 with snap ring, form S – picture 1									
20	8,1	15	11	5	6	M10	3°	18	22560.0020

Application example

