# Mounting Pads 22590.0020



### **Product Description**

Mounting pads can be used as foot or thrust pad. Not parallel bearing surfaces up to 15° degrees can be compensated.

#### Material

#### **Ball element**

· Heat-treated steel, tempered, blackened

#### Pad


· Heat-treated steel, blackened


#### More information

#### Notes

For the versions  $d_1$  = M10 and M12 the lock nut conforms to DIN 934.

#### **Drawing**





#### **Order information**

Dimensions					ws	WS Load capacity for static load		ı	Art. No.
d₁	d <sub>2</sub>	h <sub>1</sub> ~	h <sub>2</sub>	t		max.	max.		
[mm]					[mm]	[kN]	[°C]	[g]	
pad and ball element – picture 1, Heat-treated steel									
M20	60	42	8	17	30	55	250	413	22590.0020




Erwin Halder KG

www.halder.com Page 1 of 2

Published on: 22.11.2018

## **Application example**

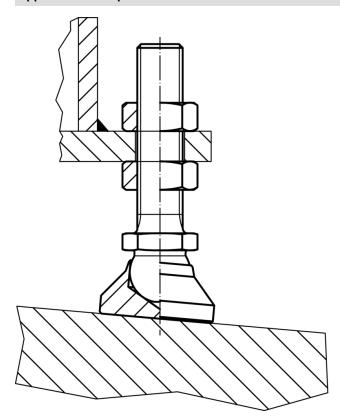



Erwin Halder KG

www.halder.com Page 2 of 2
Published on: 22.11.2018