


Pin

22690.0302

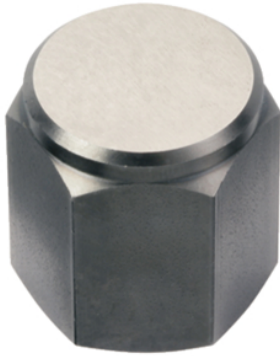


**Product Description**

To be used as seats, stops and thrust pads.


**Material**

- Steel, case-hardened, blackened


**Drawing**




picture 1




picture 4




picture 2



picture 5



picture 3



picture 6

**Order information**

$l_1$ $\pm 0,01$	d	Dimensions			WS	Tightening torque <sup>1)</sup> max.		Art. No.
		d <sub>1</sub>	d <sub>2</sub>	t	[mm]	[Nm]	[g]	
[mm]								
with female thread and plain surface tolerance $l_1 = \pm 0,01$ – picture 4								
25	M12	22	25,2	15	22	82	65	22690.0302

<sup>1)</sup> The tightening torque of bolts with female thread is for threaded pins, quality 8. The bolt has to be tightened over the total thread length.

Application example

