Self-Aligning Pads 22730.0160



Product Description

Self-aligning pads are used as stop, support and thrust pad and are suitable for installation in clamping elements.

Material

Ball

• Stainless steel 1.3541, nickel-plated

Body


· Stainless steel 1.4057, heat-treated

More information


Notes

Ball protected against rotating. Loading capacity valid for steel and stainless steel designs.


Drawing




picture 1



picture 3



picture 2



picture 4


Order information

$\begin{array}{c c c c c c c c c c c c c c c c c c c $						ws	Load capacity for static load max.	Tightening torque max.	ı	Art. No.
[mm]						[mm]	[kN]	[Nm]	[9]	
with male thread, flat-faced ball, plain surface – picture 1, Stainless steel										
50	M24	34,5	35	24	40	41	165	698	526	22730.0160



www.halder.com Page 1 of 2 Published on: 12.4.2019

Application example

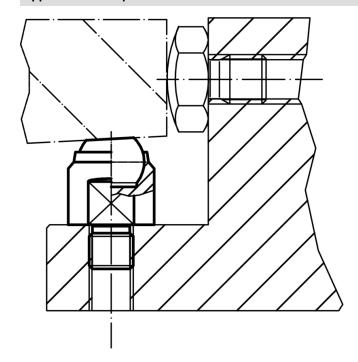



www.halder.com Page 2 of 2
Published on: 12.4.2019