# Self-Aligning Pads- adjustable 22740.0330



## **Product Description**

Self-aligning pads are used as stop, support and thrust pad and are suitable for installation in clamping elements.

### **Material**

#### Ball

· Ball-bearing steel, hardened, bright

#### Body

· Heat-treated steel, tempered, phosphated

#### Nut


• Steel, blackened (ISO 4035)

### More information

## Notes

Ball protected against rotating. Loading capacity valid for steel and stainless steel designs. Special types on request.

## Drawing

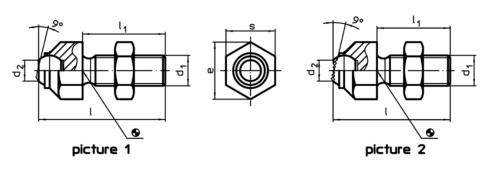

## Order information

Dimensions							Load capacity	Tightening torque		Art. No.
s	d <sub>1</sub>	I	l <sub>1</sub>	d <sub>2</sub>	е	Ball	for static load max.	max.		
[mm]							[kN]	[Nm]	[9]	
with flat-faced ball, ribbed surface – picture 2, Heat-treated steel										
30	M20	77,3	50	20	33	25	90	407	274	22740.0330

# **Application example**

