Self-Aligning Pads- adjustable with self-resetting 22741.0124



Product Description

Self-aligning pads are used as stop, support and thrust pad and are suitable for installation in clamping elements.

By resetting to the parallel position the contact point of the self-aligning pad provides a defined initial position, thus preventing the pad clamping in an oblique position when inserting the workpiece.

Material

Spring elementThermoplastic PUR

Ball

• Stainless steel 1.3541, nickel-plated

Body

· Stainless steel 1.4057, heat-treated


Nut

Stainless steel

More information

Notes

Ball protected against rotating. Loading capacity valid for steel and stainless steel designs. Special types on request.

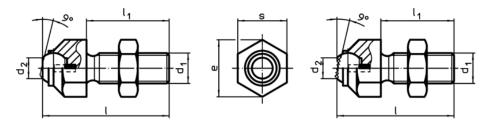

picture 2

Order information

picture 1

Drawing

Dimensions							Load capacity	Tightening torque	Ĩ	Art. No.
s	d ₁	I	I ₁	d ₂	e	Ball	for static load max.	max.	_	
[mm]							[kN]	[Nm]	[g]	
with flat-faced ball, plain surface – picture 1, Stainless steel										
24	M16	60,7	40	10,5	27	16	25	206	124	22741.0124