

Positioning Sensors· pneumatic

22800.0010



Product Description

Used in jigs and fixtures as positioning control for pre-machined workpieces. Sensitivity accuracy 0,015 - 0,075 mm depending on the workpiece surface. Contact control by the compressed-air backwash, indicated on the monitoring unit (Art. No. 22800.0612).

Material

Seating Pins

- Tool steel, hardened, ground

Seal

- PVC

Screw

- Steel, zinc-plated by galvanization, quality 4.8 (ISO 1207)

Plug-in nipple

- Brass

More information


Notes

Further information on request.


Further products

- Monitoring Units for Positioning Sensors, pneumatic

Drawing

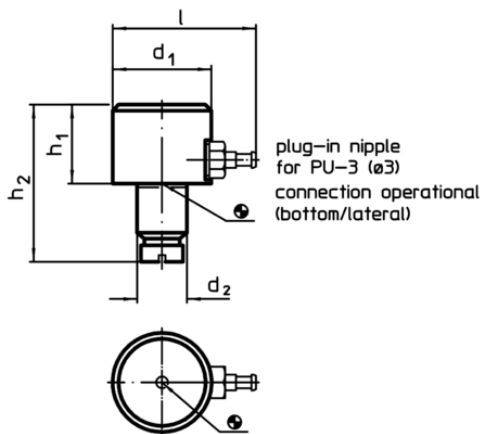

picture 1



picture 2

Order information

Dimensions					[g]	Art. No.
d ₁	h ₁ h ₉	d ₂ n6 [mm]	h ₂	l		
Bottom/lateral connection – picture 1						
16	13	8	27	28	32	22800.0010

Application example

