

## Spherical Washers / Conical Seats • DIN 6319

23050.0122

### Product Description



#### Material

##### Conical seat

- Case-hardened steel, case-hardened, manganese phosphate treated

#### Assembly


Conical seats form D are to be used only for plain, closed round areas.  
For larger holes only use form G!

#### More information

#### Further products

- Spherical Washers / Conical Seats, similar to DIN 6319, stainless steel
- Fixture Nuts, DIN 6330 (height 1,5 d)

### Drawing

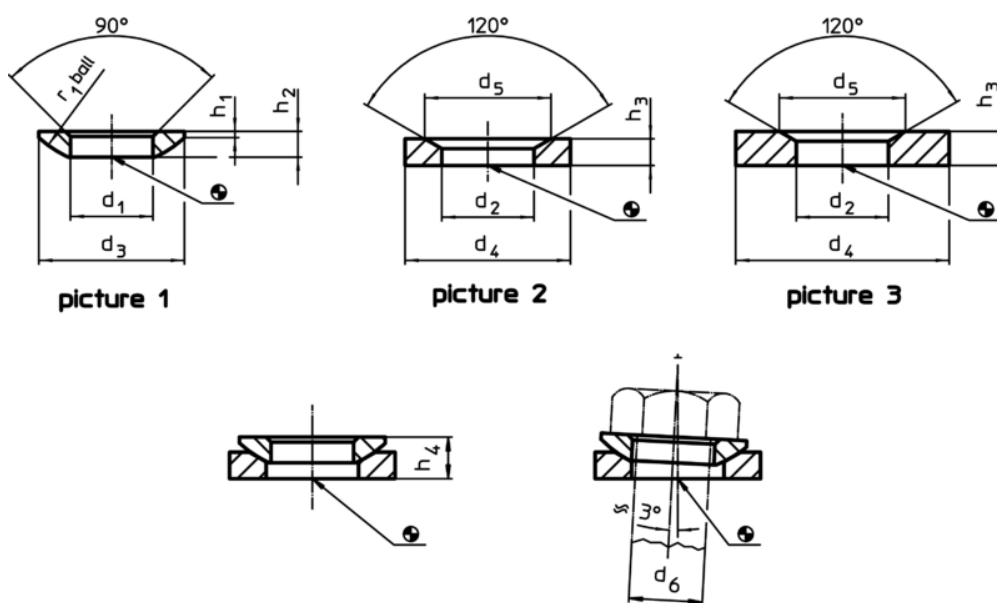

### Order information

d <sub>2</sub> H13	Dimensions			For pin d <sub>6</sub> [mm]	For screws d <sub>6</sub> [mm]	Load capacity for static load max. [kN]	Torque for screwed connections <sup>1)</sup> max. [Nm]	Art. No. <sup>2)</sup>
	d <sub>4</sub>	d <sub>5</sub>	h <sub>3</sub>					
conical seats from case-hardened steel, form D – picture 2								
26	40	34	8,5	22	M22	146	542	44 23050.0122

<sup>1)</sup> Torques of screws 8.8, eventual pre-loads to be considered, coefficient of friction  $\mu_{total}$  0,14.

<sup>2)</sup> DIN standards do not include these dimensions.

Application example

