Positioning Clamping Pins 23111.0116



Product Description

The positioning clamping pin allows fast clamping, fastening, adjusting, changing and securing of workpieces, plates, fixture systems etc.

Material

• Stainless steel 1.4542, precipitationhardened

Operation

By tightening the clamping screws, the positioning clamping pin is centered and clamped with four balls in the locating bush. The clamping screw can be operated manually via a removable handle (Art.-Nr. 23111.0900/.0902) or via an hex. key.

More information


Accessories

Suitable bushings are available.

Further products

- Manual Handles, for positioning clamping pins
- Bushings, for positioning clamping pins
- Locating Bushings, for positioning clamping pins, for press fit
- Locating Bushings, for positioning clamping pins, for screw fit

Drawing

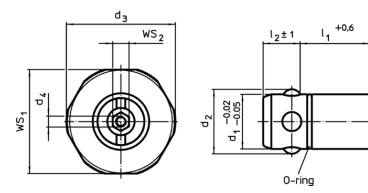

Order information

Dimensions								For base	WS ₁	WS ₂	Holding force	Ĭ.	Art. No.	
d ₁ -0,02 -0,05	Ι ₁ +0,6	d ₂	d ₃	d₄	Ι 2 ±1	I ₃	s ~	plates ±0,05				_		
[mm]								[mm]	[mm]	[mm]	[kN]	[g]		
Stainless	Stainless steel													
16	25	18,7	32	M4	13,6	10	9	20	30	6	5	105	23111.0116	

l₃

9

Application example

