

Taper Clamping Units

23250.0162



Product Description

Material

Body

- Tool steel, hardened, bright

Screw

- Heat-treated steel, tempered, quality 12.9

Spring

- Spring steel wire

Clamping Jaws

- Tool steel, hardened, blackened and ground

Assembly

Can be mounted in a threaded hole or with T-nuts for horizontal or vertical multiple clamping.

Operation

Inserting the socket head screw moves the two clamping chucks outwards and presses the workpieces against a stop. Using the double taper, an additional vertical clamping force will be achieved. Stroke of taper clamping units with M 5 = ±0,5, M 8 = ±0,5, M 12 = ±1 and M 16 = ±1,5. Can be mounted in a threaded hole or with T-nuts for horizontal or vertical multiple clamping.

More information

References

For further taper clamping units please refer to chapter "Multiple Clamping System".


Accessories

T-Nuts EH 23010. have to be purchased separately.


Further products

- Nuts for T-slots, DIN 508
- Taper Clamping Units, flat / ribbed, M8
- Taper Clamping Units, flat / ribbed, M12
- Taper Clamping Units, with screw fastened thread, M12

Drawing

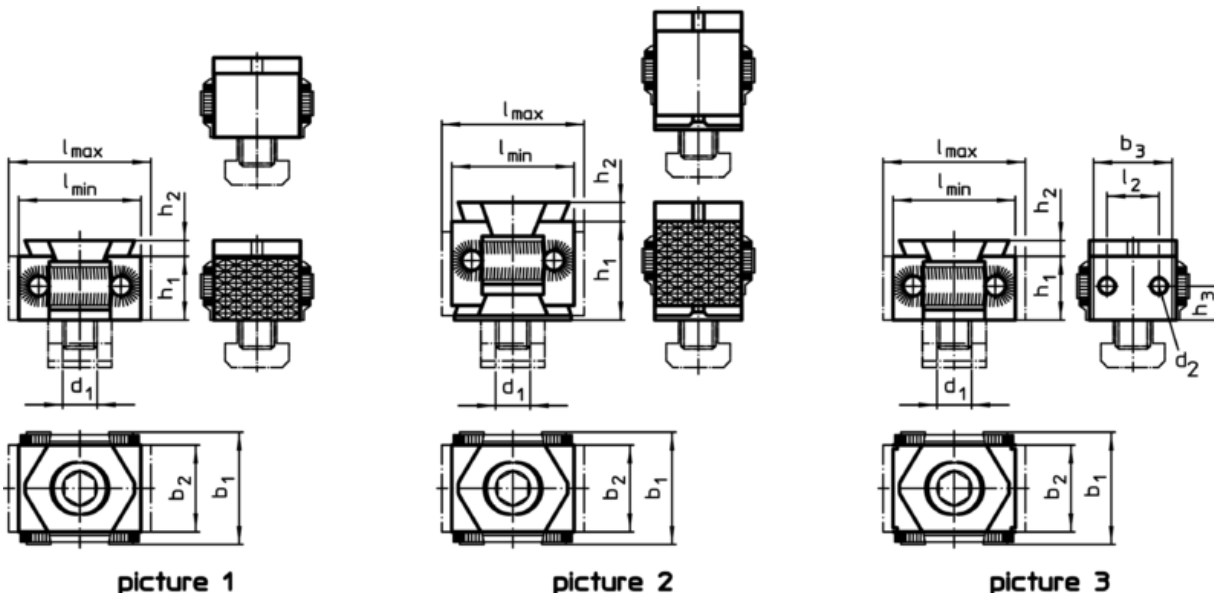

Order information

d ₁	l	l ₂	Dimensions							Clamping force max. [kN]	Tightening torque max. [Nm]	 [g]	Art. No.
			b ₁	b ₂	b ₃	d ₂	h ₁	h ₂	h ₃				
single taper, clamping jaw with screw fastened thread – picture 3													
M12	46 – 53	18	41	30	28	M5	22	4	11	30	85	247	23250.0162

Application example

