

Taper Clamping Units - flat / ribbed, M12

23250.0510



Product Description

Inserting the socket head screw moves the two clamping chucks outwards and presses the workpieces against a stop. Stroke of taper clamping units with M8 = +/- 0.5 mm, M12 = +/- 1 mm.

Material

Body

- Tool steel, hardened, bright

Screw

- Heat-treated steel, tempered, quality 12.9

Spring

- Spring steel wire

Clamping Jaws


- Tool steel, hardened, blackened and ground

More information

Further products

- Taper Clamping Units

Drawing

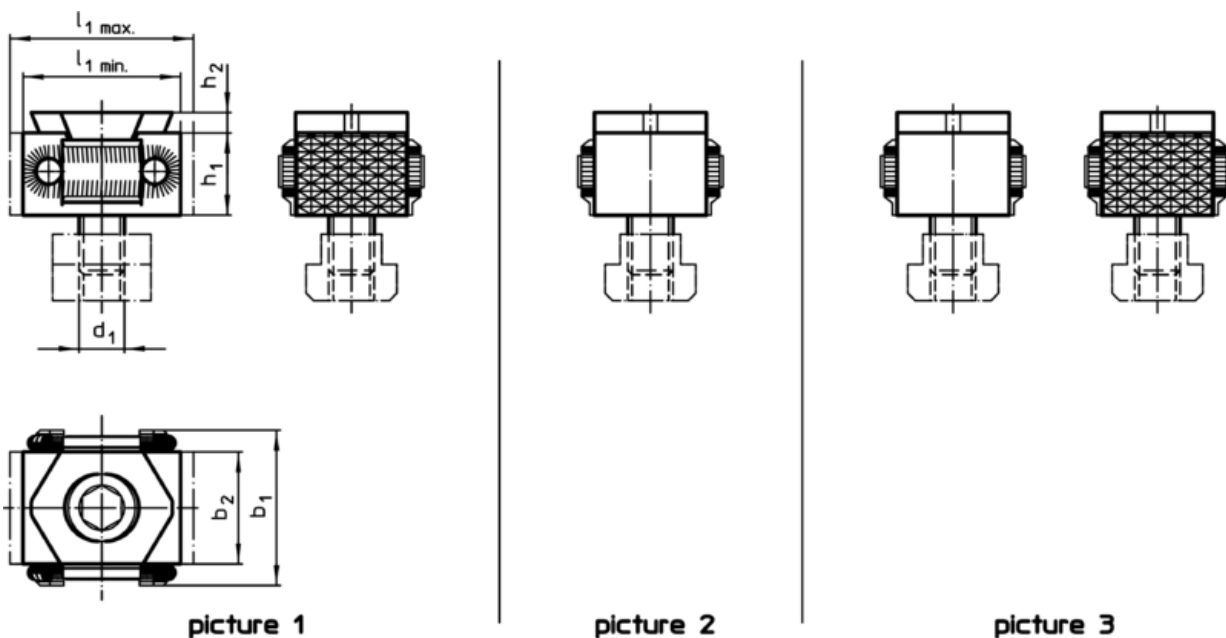

Order information

| Dimensions | | | | | | | [g] | Art. No. |
|---|------------------------|------------------------|----------------|----------------|----------------|----------------|-----|------------|
| d ₁ | l ₁ min. | l ₁ max. | b ₁ | b ₂ | h ₁ | h ₂ | | |
| clamping jaw ribbed on both sides – picture 1 | | | | | | | | |
| M12 | 42 | 49 | 41 | 30 | 22 | 4 | 280 | 23250.0510 |