

Double Edge Clamps

23251.0006



Product Description

Inserting the socket head screw moves the two clamping chucks outwards and presses the workpiece against a stop.

Material

Body

- Aluminium

Taper

- Case-hardened steel, blackened

Screw

- Steel

Assembly

Can be mounted in a threaded hole or with T-nuts for horizontal or vertical multiple clamping.

More information


Accessories

T-Nuts EH 23010. have to be purchased separately.


Further products

- Nuts for T-slots, DIN 508

Drawing

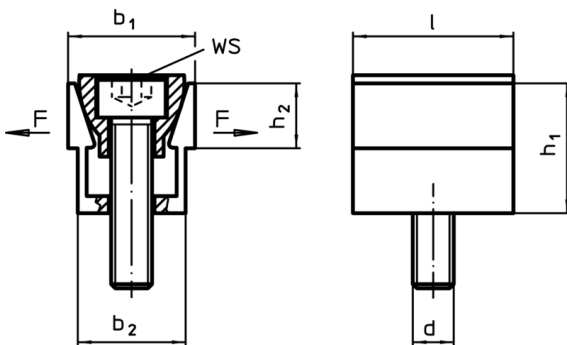

Order information

b ₁	b ₁ max. spread	Dimensions					WS	Clamping force max.	Tightening torque max.		Art. No.
		b ₂	h ₁	h ₂	l	d					
		[mm]									
18,6	20,3	16,1	19	9,5	23,8	M6	5	6,7	14,3	36	23251.0006

Application example

