Floating Clamps. combined clamping and locking M 12 23320.0012



Product Description

The floating clamp is used to clamp and support additional clamping points on components. The benefits of the floating clamp are:

- · avoids vibration during the processing
- · clamps ribs, beads and shackles to reinforce clamped components
- · distortion-free clamping of raw parts.

Material

Adjustable body

· Aluminium, red anodised

Body

Case hardened steel, nitrided, manganese phosphate treated and ground

Clamping Jaws

Case hardened steel, nitrided, manganese phosphate treated

Assembly

- 1. Mount the floating clamp (M 12 connection thread) onto the device with a wrench (WS 46)
- 2. Adjust the height limit stop and the rotating area with the red sleeve and clamp with a set screw (3 x WS 2.5). When setting the height limit, consider tolerance of workpiece.

Operation

- 1. Push the floating clamp downwards.
- 2. Pivot the clamping jaws in as far as possible. The floating clamp contacts the bottom of the workpiece with a slight spring load.
- 3. Tighten the floating clamp with a hexagonal nut (WS 18) having a min. torque of 15 Nm and a maximum torque of 30 Nm. In the clamping process, the workpiece is clamped and simultaneously supported. 4. Releasing is done in reverse order.

More information

Notes

The thread bore must always be closed for safe functioning, e.g. set screw M 12 x 10. For specific clamping situations, the standard clamping jaws supplied can be exchanged or replaced (see catalogue drawing: screw ISO 4762 - M8 - 12.9, M max. = 43 Nm).

References

Additional flexible possibility of fitting with holder 23470.0250 or holding plate for downhold clamps 23210.0740.


Accessories

As an accessory, we offer clamping jaws with an increased clamping range, refer to 23320.0050-.0058, as well as pivot jaws, refer to 23320.0148-.0156.

Further products

- · Holding Plates, for down-hold clamps
- Floating Clamps, separate clamping and locking M 12
- Standard Clamping Jaws, for floating clamp M 12
- Clamping Jaws, for floating clamp M 12

Drawing

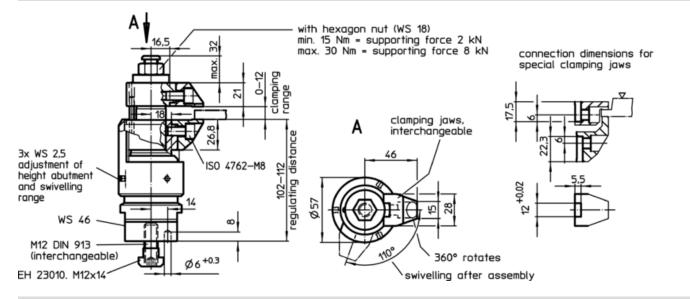

Order information

la l	Art. No.
[9]	
2076	23320.0012

Application example



