# Eccentric Quick Clamps · with female thread

23390.0002



# **Product Description**

For quick and easy clamping and releasing of workpieces. When using the "adjustable" design (picture 2) the lever position can be moved.

#### Material

# Support washer

· Thermoplastic PA, glass-fiber reinforced

#### Leve

· Zinc die-cast, plastic coated, black

# Threaded part

• Steel, zinc-plated by galvanization


#### Inner parts

· Steel, zinc-plated by galvanization

### Adjusting nut

• Steel, zinc-plated by galvanization

# **Drawing**

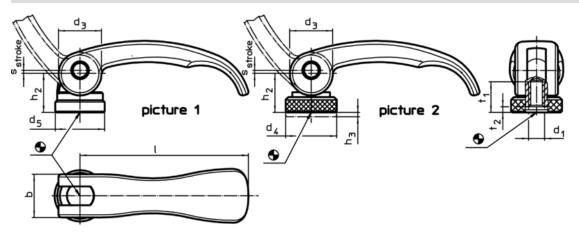


# **Order information**

| Dimensions                            |                |                |                |            |    |                |   | Stroke<br>s           |      | I   | Art. No.   |
|---------------------------------------|----------------|----------------|----------------|------------|----|----------------|---|-----------------------|------|-----|------------|
| I                                     | d <sub>1</sub> | d <sub>3</sub> | d <sub>5</sub> | h₂<br>max. | b  | t <sub>1</sub> | t <sub>2</sub><br>min.<br>in clamping<br>position | at 90° lever position | max. |     |            |
| [mm]                                  |                |                |                |            |    |                |   | [mm]                  | [°C] | [g] |            |
| with female thread – picture 1, Steel |                |                |                |            |    |                |   |                       |      |     |            |
| 82                                    | M8             | 20             | 22,5           | 19,5       | 20 | 15             | 3,7   | 1                     | 80   | 116 | 23390.0002 |



www.halder.com Page 1 of 2
Published on: 11.7.2018

# **Application example**

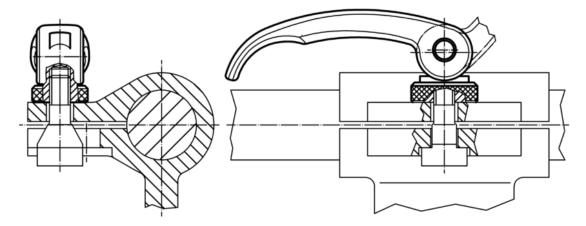



Page 2 of 2 Published on: 11.7.2018

www.halder.com