Eccentric Quick Clamps- with female thread 23390.0003



Product Description

For quick and easy clamping and releasing of workpieces. When using the "adjustable" design (picture 2) the lever position can be moved.

Material

Support washer

Thermoplastic PA, glass-fiber reinforced

Lever

· Zinc die-cast, plastic coated, black

Threaded part

· Steel, zinc-plated by galvanization


Inner parts

• Steel, zinc-plated by galvanization

Adjusting nut

• Steel, zinc-plated by galvanization

Drawing

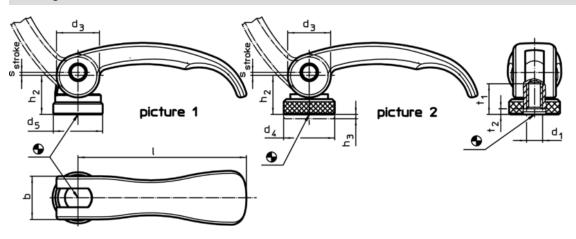

Order information

Dimensions								Stroke s	ß	Ĩ	Art. No.
I	d₁	d ₃	d₅	h₂ max.	b	t ₁	t ₂ min. in clamping position	at 90° lever position	max.		
[mm]								[mm]	[°C]	[g]	
with female thread – picture 1, Steel											
63	M5	16	18,5	16,4	16	13	3	0,75	80	60	23390.0003

Application example

