Eccentric Quick Clamps• with female thread

23390.0103



Product Description

For quick and easy clamping and releasing of workpieces. When using the "adjustable" design (picture 2) the lever position can be moved.

Material

Support washer

• Thermoplastic POM, glass-fiber reinforced

Lever

· Zinc die-cast, plastic coated, black

Threaded part

• Steel, zinc-plated by galvanization


Inner parts

· Steel, zinc-plated by galvanization

Adjusting nut

· Steel, zinc-plated by galvanization

Drawing

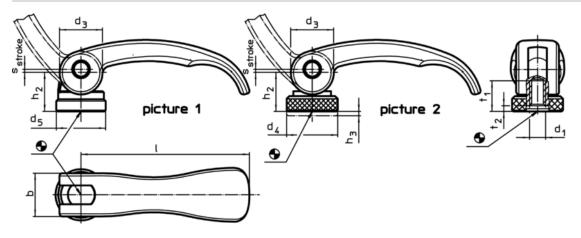


Order information

Dimensions									Stroke s		I	Art. No.
ı	d₁	d ₃	d ₄	h₂ max.	Regulating- range h ₃ min.	b	t ₁	t ₂ min. in clamping position	at 90° lever position	max.		
[mm]									[mm]	[°C]	[g]	
with female thread, adjustable – picture 2, Steel												
63	M5	16	19	16,4	1,5	16	13	3	0,75	80	65	23390.0103



www.halder.com Page 1 of 2
Published on: 11.7.2018

Application example

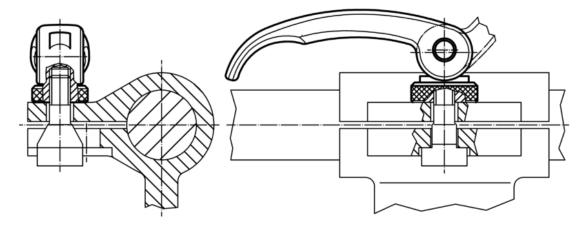



Page 2 of 2 Published on: 11.7.2018

www.halder.com