

Lateral Plungers with plastic spring and pin - INCH  
2B150.0330



Product Description

To be used for positioning and applying pressure, e.g. during painting and sandblasting.

Material

- Body**
  - Aluminium
- Spring**
  - Plastic
- Pin**
  - Stainless steel


Assembly

Installation by pressing in.  
Formula for calculating the center distance for the mounting hole:  
 $l_0 = z/2 + w + x$   
 $l_0$  = center distance,  
 $y$  = workpiece height,  
 $w$  = workpiece length,  
 $x$  = coordinate dimension,  
 $s$  = stroke,  
 $z$  = stop diameter  
Calculation dimension  $x$ :  
 $y$  greater than or equal to  $l_2 - d_2/2$ , then  $x = d_2/2 - s$   
or  
 $y$  smaller than  $l_2 - d_2/2$ , then  $x = d_2/2 - s - [(l_2 - d_2/2 - y) * 0,123]$

Characteristic

Standard spring load = red spring

Drawing

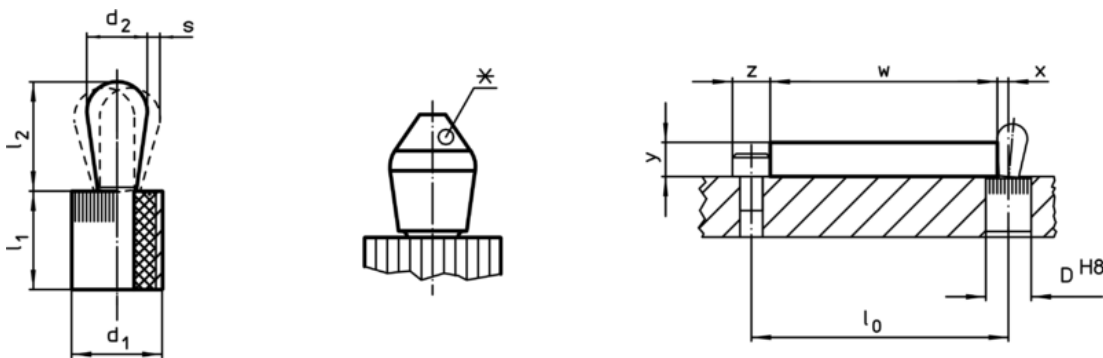



\*some sizes (see chart) have a deviating pin shape

Order information

Dimensions		Spring load F max. <sup>1)</sup> ~ [lb]	Dimensions		Stroke s [inch]	Location hole D H8 [inch]	max. [°F]	oz	Art. No.
d <sub>1</sub> [inch]	d <sub>2</sub> [inch]		l <sub>1</sub> -0,03 [inch]	l <sub>2</sub> ±0,02 [inch]					
Pin: Stainless steel/standard spring load									
1/2	0,315	11,1	0,553	0,515	0,048	0,5	212	0,246	2B150.0330

<sup>1)</sup> statistical average value

Accessories

	Dimensions d <sub>1</sub> [inch]	 [oz]	Art. No.
assembly tool			
	1/2	2,321	<a href="#">22150.0832</a>