

CONSTRUCTION SPACER 3-SLOT

GLOBAL STANDARD COMPONENTS




Assembly

08/24/07

C

NOTE:

- 1.) ELECTROETCH DIM A ON EDGE OF SPACER
 - 2.) BLACK OXIDE FINISH
 - 3.) SURFACES TO BE FLAT AND PARALLEL TO WITHIN 0.015 T.I.R.
 - 4.) METRIC TOLERANCES: UNLESS OTHERWISE SPECIFIED:
 0 PLACE ± 0.5
 1 PLACE ± 0.3
 - 5.) ALL SLOTS TO BE 10.50 ± 0.20
 - 6.) ALL SLOT LOCATING DIMENSIONS TO BE ± 0.25
- MATERIAL: S.A.E. 1020 HRS
 SEE PAGE B-1.1 FOR GLOBAL MATERIALS CHART

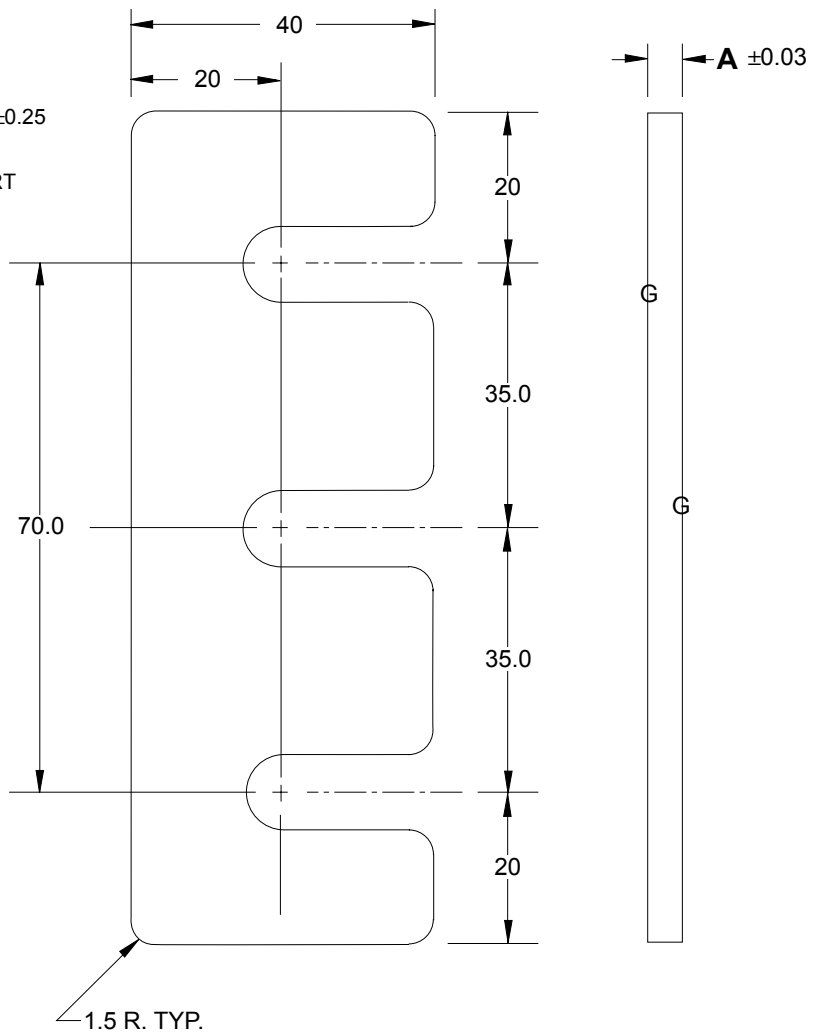

B

A

D

NAAMS CODE	A
ACS330S	3.00
ACS332S	3.20
ACS334S	3.40
ACS336S	3.60
ACS338S	3.80
ACS340S	4.00
ACS342S	4.20

NAAMS CODE	A
ACS344S	4.40
ACS346S	4.60
ACS348S	4.80
ACS350S	5.00
ACS352S	5.20
ACS354S	5.40
ACS356S	5.60

NAAMS CODE	A
ACS358S	5.80
ACS360S	6.00
ACS362S	6.20
ACS364S	6.40
ACS366S	6.60
ACS368S	6.80
ACS370S	7.00