METRIC FITTING SPACERS 3-HOLE

GLOBAL STANDARD COMPONENTS
NAAMS™

Assembly 08/24/07

NOTE:
1.) ELECTROETCH DIM A ON EDGE OF SPACER
2.) ALL DIMENSIONS ARE METRIC
3.) BLACK OXIDE FINISH
4.) SURFACES TO BE FLAT AND PARALLEL TO WITHIN 0.015 mm T.I.R.
5.) METRIC TOLERANCES: UNLESS OTHERWISE SPECIFIED:
1 PLACE ± 0.3 mm
2 PLACE ± 0.03 mm

MATERIAL: S.A.E. 1020 HRS

SEE PAGE B-1.1 FOR GLOBAL MATERIALS CHART

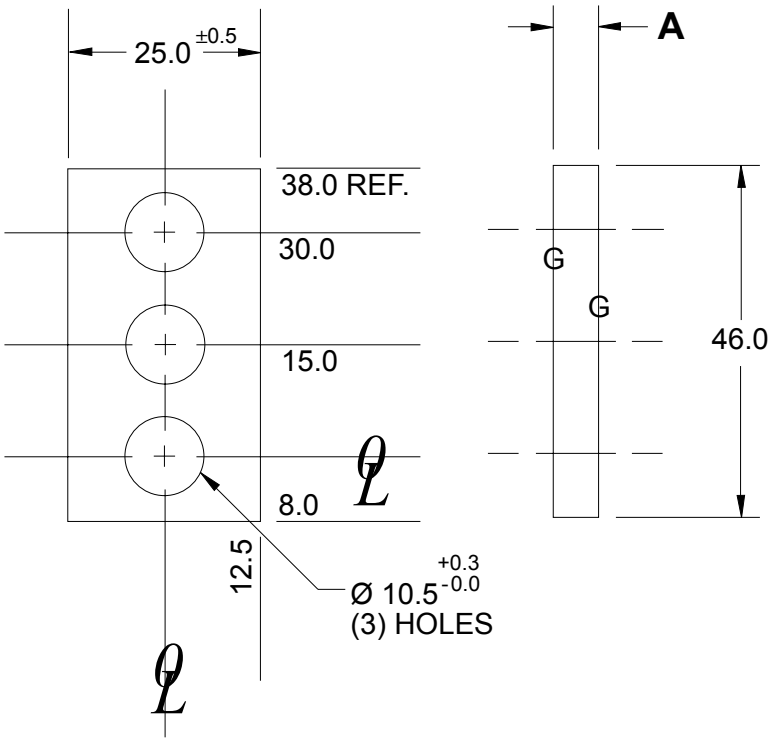

NAAMS CODE	A
ASP330	3.00
ASP332	3.20
ASP334	3.40
ASP336	3.60
ASP338	3.80
ASP340	4.00
ASP342	4.20
ASP344	4.40
ASP346	4.60
ASP348	4.80
ASP350	5.00
ASP352	5.20
ASP354	5.40
ASP356	5.60
ASP358	5.80
ASP360	6.00
ASP362	6.20
ASP364	6.40
ASP366	6.60
ASP368	6.80
ASP370	7.00

©1997 Auto/Steel Partnership