




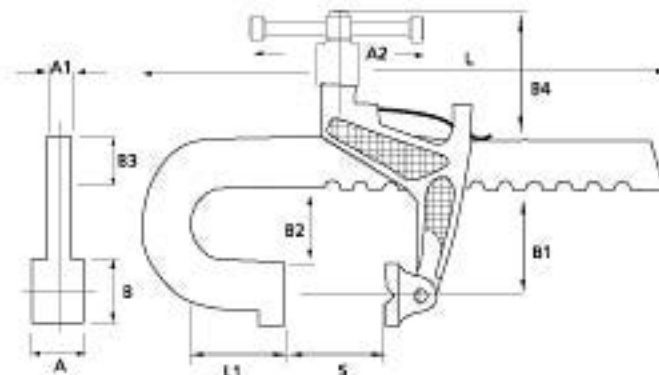


Rack Clamps

For tough jobs in engineering including

- Fabrication
- Welding
- Machining
- Maintenance
- Toolroom



1 daN = 1 kgf
1 daN = 2.2 lbf
1 daN = 10 N

	Model No.	Capacity (S)		Reach (B1)		Overall Length		Weight kg	Measurements in mm								
		mm	Inch	mm	Inch	mm	Inch		A	A1	A2	B	B2	B3	B4	L	L1
Standard Duty  1130 daN	T186-150	150	(6)	60	(2½)	245	(9¾)	1.4	25	13	76	32	43	33	76	245	20
	T186-300	300	(12)	60	(2½)	395	(15½)	1.8	25	13	76	32	43	33	76	395	20
	T186-500	500	(20)	60	(2½)	640	(25¼)	2.5	25	13	76	35	43	30	76	625	30
	T186-750	750	(30)	60	(2½)	890	(35¼)	3.2	25	13	76	35	43	30	76	875	30
Standard Duty Long Reach  565 daN	T321-250	250	(10)	120	(4¾)	360	(14¼)	2.0	25	13	76	35	102	33,5	76	360	25
	T321-600	600	(24)	120	(4¾)	715	(28¼)	3.5	25	13	76	32	98	30	76	715	8
Medium Duty  1800 daN	T290-225	225	(9)	90	(3½)	420	(16½)	5.5	40	20	140	60	65	40	105	420	65
	T290-450	450	(18)	90	(3½)	655	(25¼)	7.0	40	20	140	60	65	40	105	655	65
	T290-750	750	(30)	90	(3½)	959	(37¾)	8.5	40	20	140	60	65	40	105	955	65
	T290-1000	1000	(40)	90	(3½)	1216	(47¾)	0.5	40	20	140	60	65	40	105	1205	65
Medium Duty Long Reach  900 daN	T285-225	225	(9)	200	(8)	420	(16½)	7.1	40	20	140	60	180	40	105	420	65
	T285-450	450	(18)	200	(8)	655	(25¼)	8.5	40	20	140	60	180	40	105	655	65
	T285-750	750	(30)	200	(8)	959	(37¾)	10.0	40	20	140	60	180	40	105	955	65
	T285-1000	1000	(40)	200	(8)	1216	(47¾)	11.5	40	20	140	60	180	40	105	1205	65
Heavy Duty  2700 daN	T257-150	150	(6)	115	(4½)	403	(15¾)	9.8	51	22	187	60	85	51	127	403	100
	T257-300	300	(12)	115	(4½)	555	(21¾)	10.9	51	22	187	60	85	51	127	555	100
	T257-450	450	(18)	115	(4½)	710	(27¾)	12.2	51	22	187	60	85	51	127	710	100
	T257-600	600	(24)	115	(4½)	850	(33¾)	13.1	51	22	187	60	85	51	127	850	100
	T257-900	900	(36)	115	(4½)	1165	(45¾)	15.8	51	22	187	60	85	51	127	1165	100
	T257-1350	1350	(54)	115	(4½)	1615	(63¾)	9.1	51	22	187	60	85	51	127	1615	100