




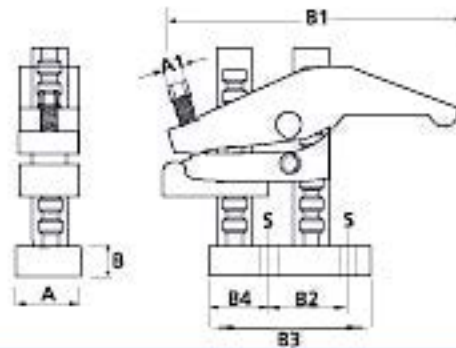

T-Slot Clamps

Holds work securely on many machines including

- Horizontal and vertical boring machines
- Planers
- Millers
- Lathes
- Power Presses
- Radial Drills



1 daN = 1 kgf
1 daN = 2.2 lbf
1 daN = 10 N

	Model No.	Clamping Height				Reach		Weight kg	Measurements in mm							
		mm	Inch	mm	Inch	mm	Inch		A	A1	B	B1	B2	B3	B4	S
Standard Duty  2270 daN	T400-100	25	(1)	100	(4)	19 (3/4) or with base reversed 35 (1 1/2)	2.3	51	13 A/F Hex	16	162	54	96.25	31.75	For M12 bolt	
	T400-150	25	(1)	150	(6)											2.5
	T400-200	62	(2 1/2)	200	(8)											2.6
Standard Duty Long Reach  1600 daN	T600-100	12	(1/2)	100	(4)	57 (2 1/4) or with base reversed 73 (2 7/8)	2.7	51	13 A/F Hex	16	200	54	96.25	31.75	For M12 bolt	
	T600-150	12	(1/2)	150	(6)											2.9
	T600-200	50	(2)	200	(8)											3.0
Heavy Duty  2620 daN	T402-150	0	0	150	(6)	44 (1 1/4) or with base reversed 66 (2 1/2)	6.3	76	19 A/F Hex	19	249	71	140	54	For M16 bolt	
	T402-300	0	0	300	(12)											8.0
	T402-450	150	6	450	(18)											8.8
	T402-600	300	12	600	(24)											10.0
	T402-750	450	18	750	(30)											11.7
	T402-900	600	24	900	(36)											13.0
	T402-1050	750	30	1050	(42)											14.5
	T402-1200	900	36	1200	(48)											15.7
	T402-1350	1050	42	1350	(54)											16.7
T402-1500	1200	48	1500	(60)	18.5											
Heavy Duty Long Long Reach  2500 daN	T602-150	0	0	150	(6)	95 (3 3/4) or with base reversed 117 (4 1/2)	7.3	76	19 A/F Hex	19	308	71	140	54	For M16 bolt	
	T602-300	0	0	300	(12)											9.0
	T602-450	150	6	450	(18)											9.8
	T602-600	300	12	600	(24)											11.0
	T602-750	450	18	750	(30)											12.7
	T602-900	600	24	900	(36)											14.0
	T602-1050	750	30	1050	(42)											15.5
	T602-1200	900	36	1200	(48)											16.7
	T602-1350	1050	42	1350	(54)											17.7
	T602-1500	1200	48	1500	(60)											19.5