
specifications

Refrigeration

RF7.UBF.2.SD

ReFlex Series, 2 Door (Solid), Underbench Freezer



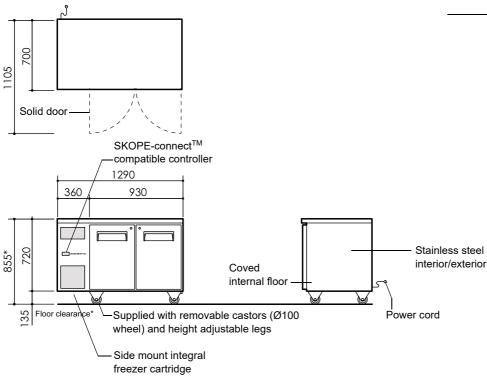

CABINET

Model ID RF7.UBF.2.SD SKOPE ID RF7UBF2-SCLH-SD

Doors 2 × self-closing, lockable, solid swing doors. LH, RH lnternal door opening 2 × door openings: 560mm high × 355mm wide

Shelves 4 × adjustable height shelves: 395mm wide × 510mm deep
Note: Bottom shelves supplied floor mounted, additional shelf clips available on request

Worktop Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating cyclopentane foamed core)

304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 40°C

Temperature range -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)

Total energy consumption 5.67 kWh/24hr

ELECTRICAL

Climate class 5 (40°C/40% RH)

Interior lighting 1 × 400mm, 4W LED light (door activated)
Power cord Supplied with 2.6m, 10 Amp plug and lead
Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 4.0 Amps (includes unit 2.0 Amps)

REFRIGERATION

Controller | SCS Connect (SKOPE-connectTM compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Side mounted, integral, removable freezer cartridge (part number

ULKDNI-0023)

Refrigerant R290 / 90g (natural refrigerant)

Nominal capacity 500 Watts

Heat rejection (Avg/peak)

Drainage

240 Watts/290 Watts

No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673 Email: skope@skope.com, Website: www.skope.com

DIMENSIONS

External Internal 855mm* 570mm Height Width 1290mm 820mm 530mm Depth 700mm $0.9m^{2}$ Floor area Weight 112kg Internal volume 248 litres

With supplied castors fitted. See height variation below

Height variation	
Supplied castors	855mm
Supplied height adjustable legs	865mm - 905mm
No castors or legs	720mm

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements		
Тор	Not required	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0631 Rev. 2.0 Mar. 202



