


3 YEAR WARRANTY

MATCH
LEB-LINK
Wonderful, Every Day

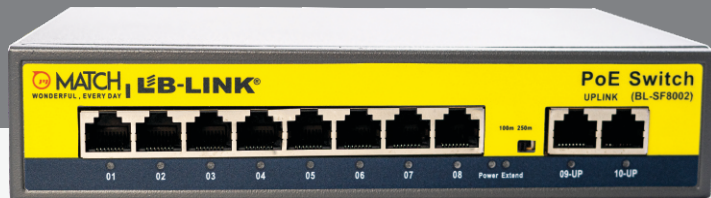

AI Artificial Intelligence
SURGE PROTECTION

8+2 PORT POE SWITCH 10/100MBPS

BL-SF8002

FEATURES



802.3at
POE



UP TO
1.6GBPS



PLUG AND
PLAY





TECHNICAL SPECIFICATION

Standards	IEEE 802.3 10-BASE-T (Ethernet) IEEE 802.3u 100-BASE-TX (Fast Ethernet) IEEE 802.3x Flow Control (full-duplex flow control) IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet
PoE Spec	PoE Standard: IEEE 802.3af/at Power over Ethernet / PSE PD classification identity PoE over current protection PoE circuit sorting protection PoE Power Output: Per Port 52V DC, Max. 30 watts (IEEE 802.3af/at) Power Budget: Max. 240W Power Pin Assignment: 1/2(+), 3/6(-)
Transmission Media	10 BaseT Cat 6 UTP/STP 100M BaseTx CAT 6 UTP/STP
Filtering/Forwarding Rates	100Mbps port-148,000pps 10Mbps port-14,880pps
LED Indicators	Per Port: Link/Act(Green), PoE Port:PoE in use(Orange) Power:PWR(Orange)
Network Interface	8 x 10/100Mbps RJ-45 PoE 1~8 Ports 2x 10/100Mbps RJ-45 Uplink 9~10 Ports
Extend/ON	1~8Port 10Mbps POE+Vlan 250M ;9~10Port 10/100Mbps
Power Input	Input: 100~240V/AC, 50~60 Hz, 1A Internal Power Supply
Power Consumption	96Watts(Max)
Dimensions: (L x W x H) / Weight	185*124*44mm /1kg
Temperature	Operating: -5 ~ 45°C Storage: -20~70°C Humidity: 10~90%, Non-condensing
Certifications	CE/FCC

