

## xFUME VAC FLEX

### Compact, flexible extraction solution for mobile individual workstations

#### Maximum flexibility for all extraction tasks

The mobile extraction unit xFUME VAC FLEX is versatile and always the right choice when an effective and flexible extraction system is required for a frequently changing single workstation.

- Freely movable extraction funnel with 2, 3 or 4 m extraction arm for easy, precise positioning
- Compact, lightweight and movable design for mobile use and easy transport
- Durable, low-maintenance motor without carbon brushes
- Easy handling thanks to easily replaceable disposable filter
- Integrated LED lighting for optimum lighting conditions even with narrow workpieces
- Simple „plug & play“ installation



#### Technical details

##### Technical data

Description	Value
Engine performance	1,1 kW
Voltage	115V / 50Hz 115V / 60Hz 230V / 50Hz
115V	without plug
230V	plug included
Cable length	5 m
Max. air flow (incl. extraction arm)	1 200 m³/h
Fan speed	2 850 U/min
Noise level	72 dB
Weight incl. extraction arm	2 m 120,0 kg 3 m 124,5 kg 4 m 129,0 kg

##### Filter

Type	Material	Surface	Classification	Efficiency	Cleanable
Main filter	glass fibre	36,00 m²	H13	99,95%	no
Prefilter	synthetic fibre	0,43 m²	G4	-	no



# xFUME VAC FLEX

## Detail

### Order information


#### Extraction unit

Type	Extraction arm 2 m	Extraction arm 3 m	Extraction arm 4 m
xFUME VAC FLEX (230V / 50Hz)	601.0096.1	601.0097.1	601.0098.1
xFUME VAC FLEX (115V / 50Hz)	601.0090.1	601.0091.1	601.0092.1
xFUME VAC FLEX (115V / 60Hz)	601.0093.1	601.0094.1	601.0095.1

#### Filter

Type	Order no.
Main filter	601.0112.1
Prefilter	601.0119.10


### Dimensions

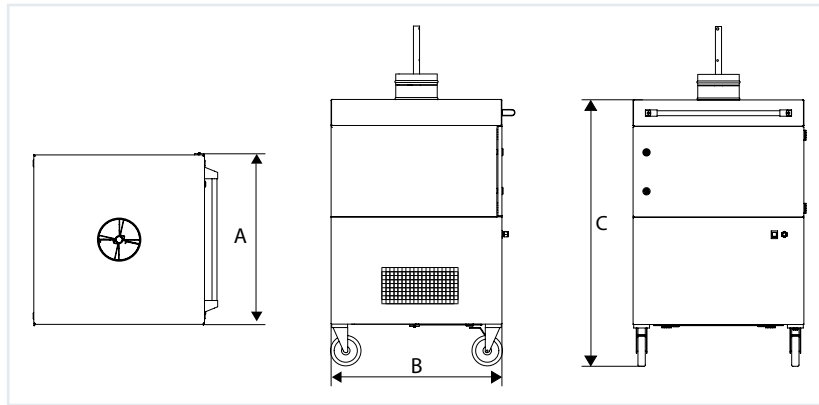

#### Dimensions

Side	Size
A	700 mm
B	700 mm
C	1095 mm

### Working range

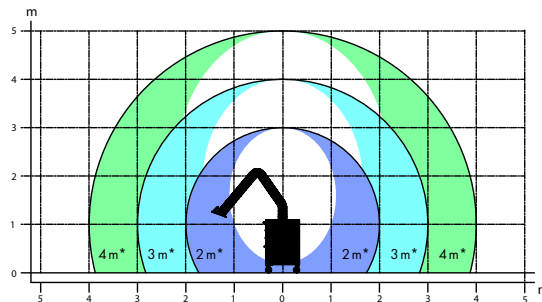

\*Extraction arm action range

### Further information



Explainer Video  
now on YouTube.  
Take a look!



**ABICOR**  
**BINZEL** 

Alexander Binzel Schweisstechnik GmbH & Co. KG  
Kiesacker · 35418 Buseck · GERMANY  
T +49 64 08 / 59-0  
F +49 64 08 / 59-191  
info@binzel-abicor.com

[www.binzel-abicor.com](http://www.binzel-abicor.com)