



TKS A2 Ø 8,0 Holzbauschraube RN SN92



GEOMETRIE

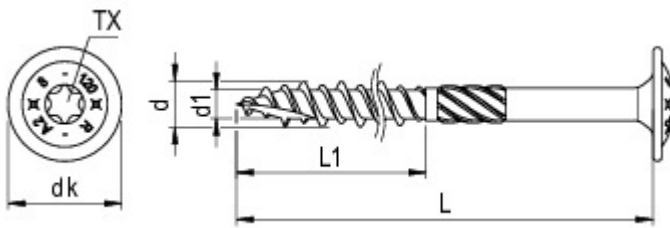

Material: Edelstahl A2
Oberfläche: blank, gleitbeschichtet


SORTIMENT

d [mm]	L [mm]	L1 [mm]	ETA	Antrieb	d1 [mm]	dk [mm]
8,0	40		•	TX 40	5,0	20,0
8,0	50		•	TX 40	5,0	20,0
8,0	60		•	TX 40	5,0	20,0
8,0	80		•	TX 40	5,0	20,0
8,0	100	80	•	TX 40	5,0	20,0
8,0	120	80	•	TX 40	5,0	20,0
8,0	140	80	•	TX 40	5,0	20,0
8,0	160	80	•	TX 40	5,0	20,0
8,0	180	80	•	TX 40	5,0	20,0

PRODUKTHINWEIS

Ab Länge 100 mm mit Schaftfräser.

TKS A2 Ø 8,0 Holzbauschraube RN SN92



TECHNIK

Zulassung: ETA-11/0106

d [mm]	8,0
Bruchdrehmoment [Nm]	18,0
Fließmoment [Nm]	12,0
Zugtragfähigkeit [kN]	12,6

EINSATZBEREICH

Konstruktionen aus Voll- und Brettschichtholz.

Holzbauwerke, Holzhäuser in Tafelbauart, Carports

VERARBEITUNG

Vorböhrern kann je nach Holzbeschaffenheit und Verarbeitungssituation notwendig sein.