



LINA SERIES


— ADJUSTABLE SPOT —

LINA



CREE  **HONOURTEK**

- Series design, deep anti-glare design, effectively reduce glare.
- The module rotates 355° horizontally and 60° vertically to meet different illumination angles.
- Narrow border/no border design, perfect combination of lighting and installation ceiling, enhance the consistency of space vision.
- The light body can be freely stretched downward upward to meet the high demand of different layers

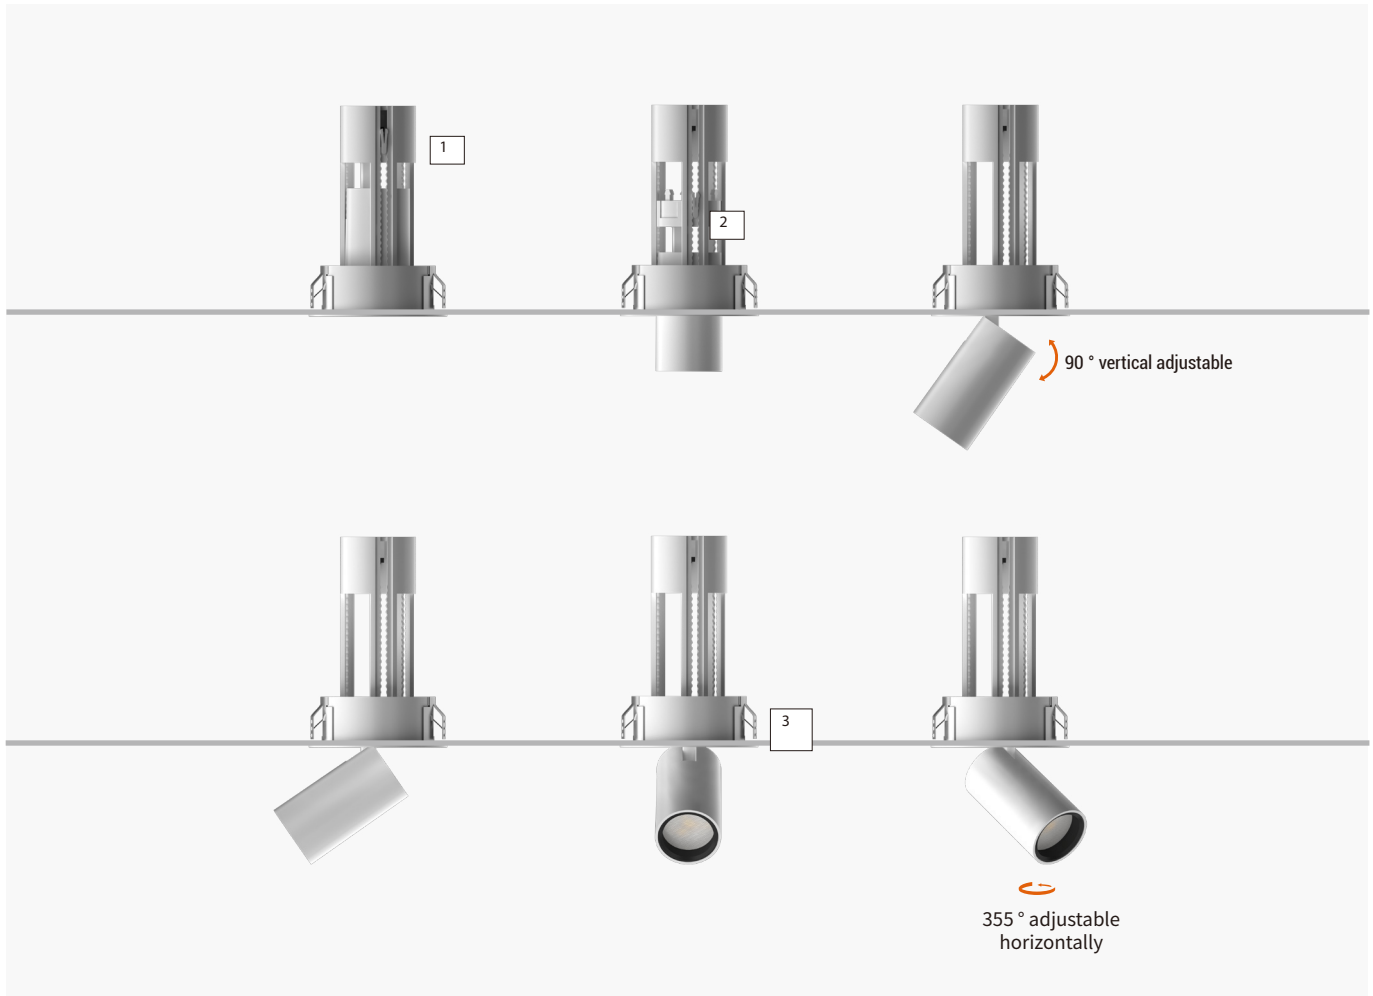


Adjustable telescopic spotlight

Optional light effect accessories can be used to create different lighting effects.
Can be combined with Linan series, light efficiency, flexible one without leakage.

- 1 Press-type fixed buckle, so that the lamp body is not easy to loosen, maintain a fixed state.
- 2 Fixed chuck with height adjustment, so that the lamp body can be fixed in the middle without slipping.
- 3 Various specifications are available, 1/2/3/4 lamp holder, reasonable installation structure can make the ceiling simple, natural and visual.

LINA

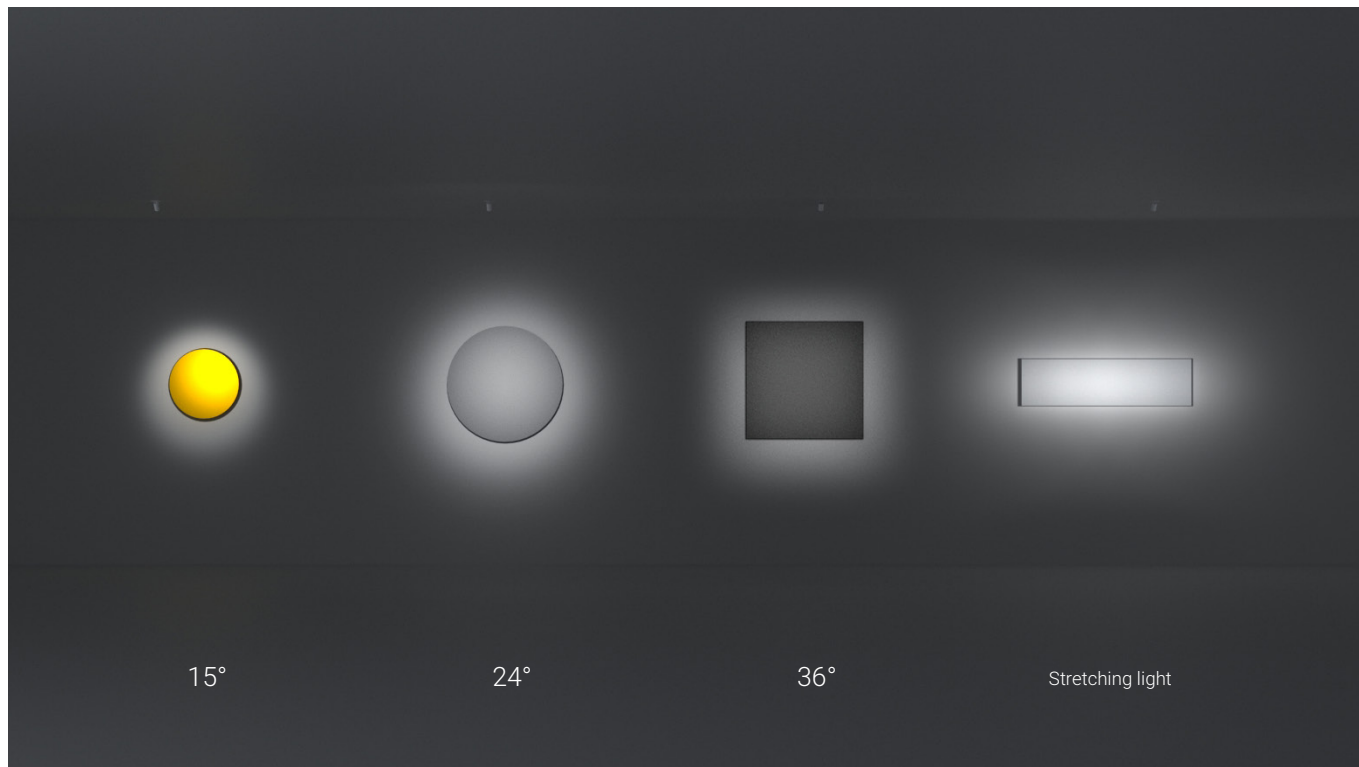

LIGHT-EFFECT ACCESSORIES



Honey comb



Soft Lens



Square



Stripe

ADJUSTABLE SPOT



White + White



White + Black



Black + Gold



Black + Black



BEAUTY OF DIFFERENT COLORS



White + White



White + Black




Black + Gold



Black + Black






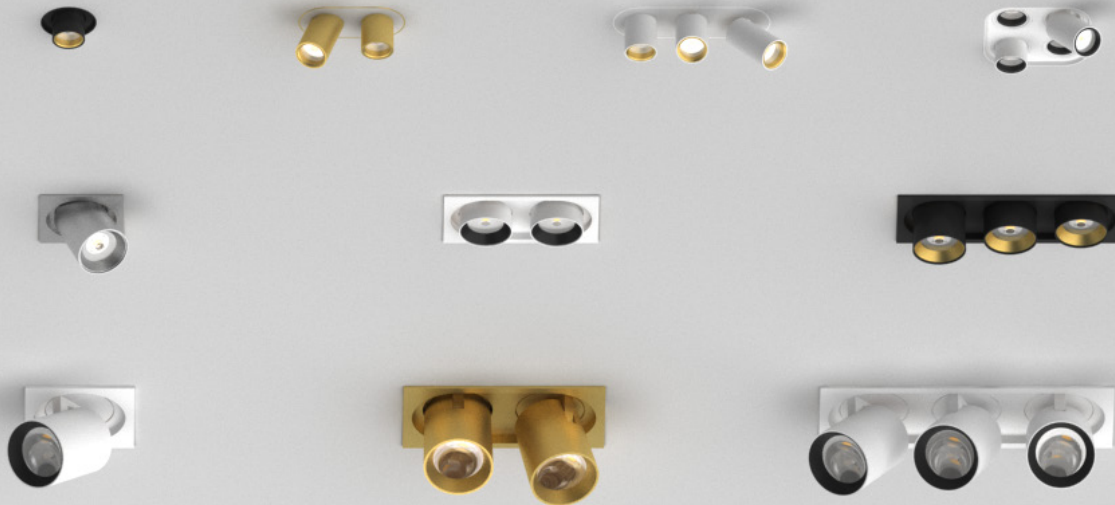

Family Design



LINA

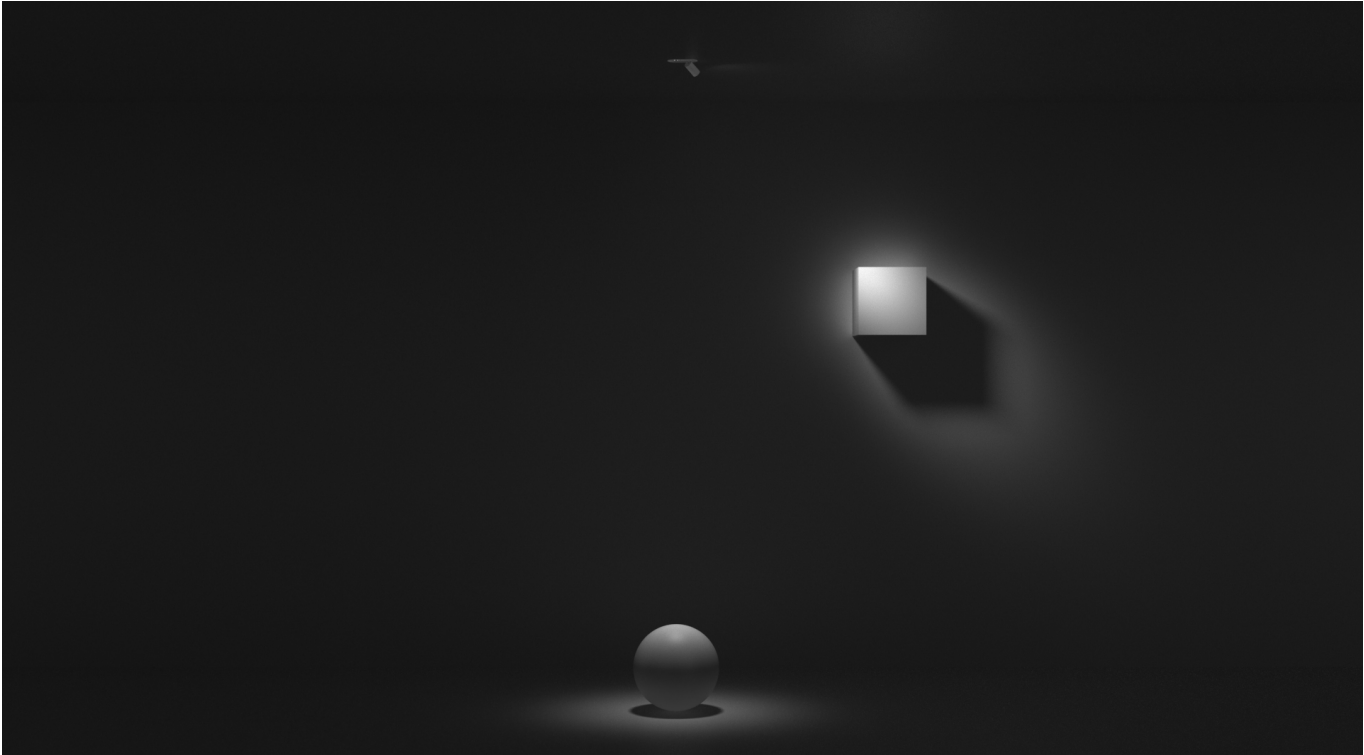

REMOVE



REPLACE



COMBINATION


Combination, more than one

Family mold design, improve the versatility of the lamp module, achieve a multi-purpose lamp;
Can be combined with Linan series, light efficiency, flexible one without leakage.



Split structure

- [1] The stretching lamp holder contains a height adjusting fixing chute. The lamp body can be fixed in the middle without slipping.




Height adjustment fixing slot



Press type fixing buckle

- [2] Rotating clasp with positioning groove for fixing rotation angle to make lamp adjust more accurately.



Position the rotating ring

- [3] Main body lamp body.

- [4] Light Source Chip.

- [5] Chip Bracket.


- [6] Nano Reflector Cup.

- [7] High Definition Lens.

- [8] Fixed front ring, optional three color replacement, white/black/gold.



LINA

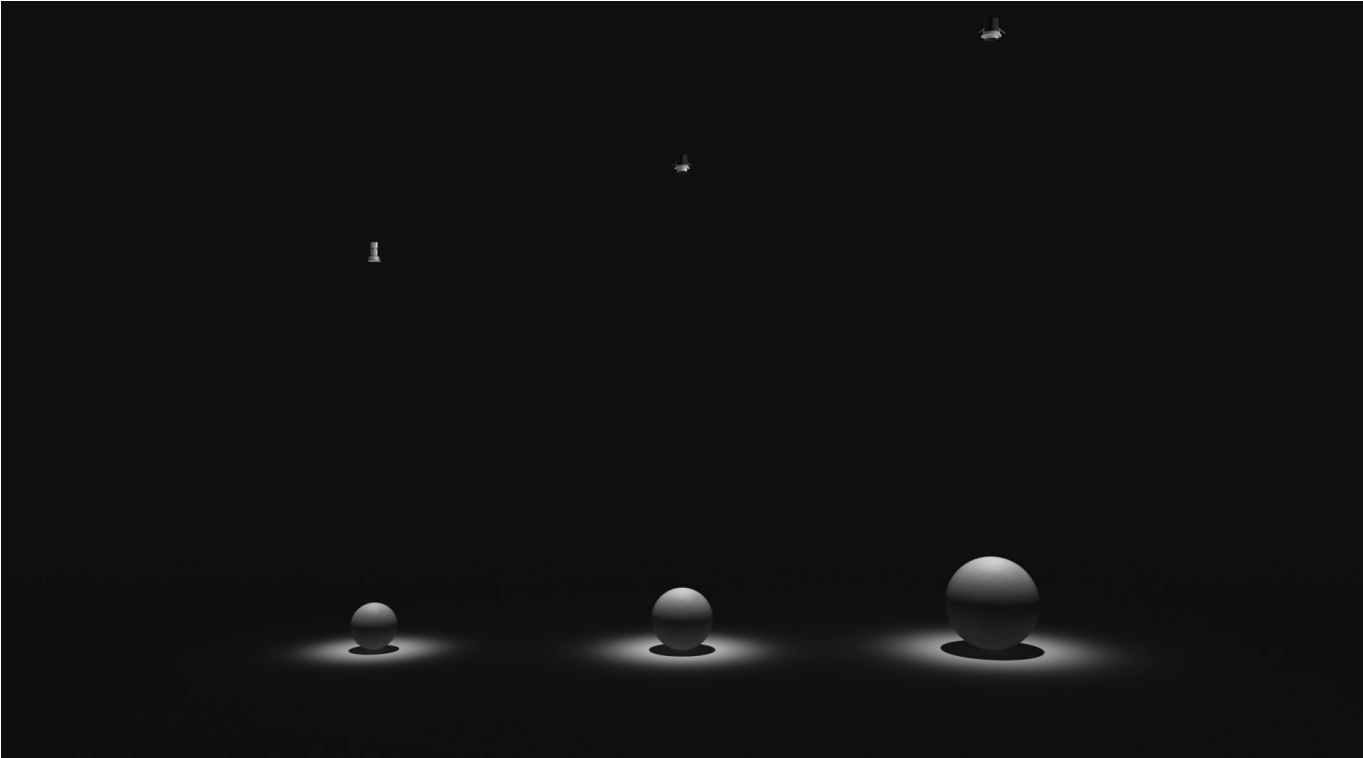

6W
≤3m



12W
3~4m



28W
4~6m

Brightness, more than one

Three kinds of power specifications are available to suit different layers.



SINGLE



DUAL



TRIPLE




TETRAD

Flexibility, more than one

Various installation structures are optional, family design, enhance visual unity;
Let the light move at will to maximize the value of light efficiency.

LINA

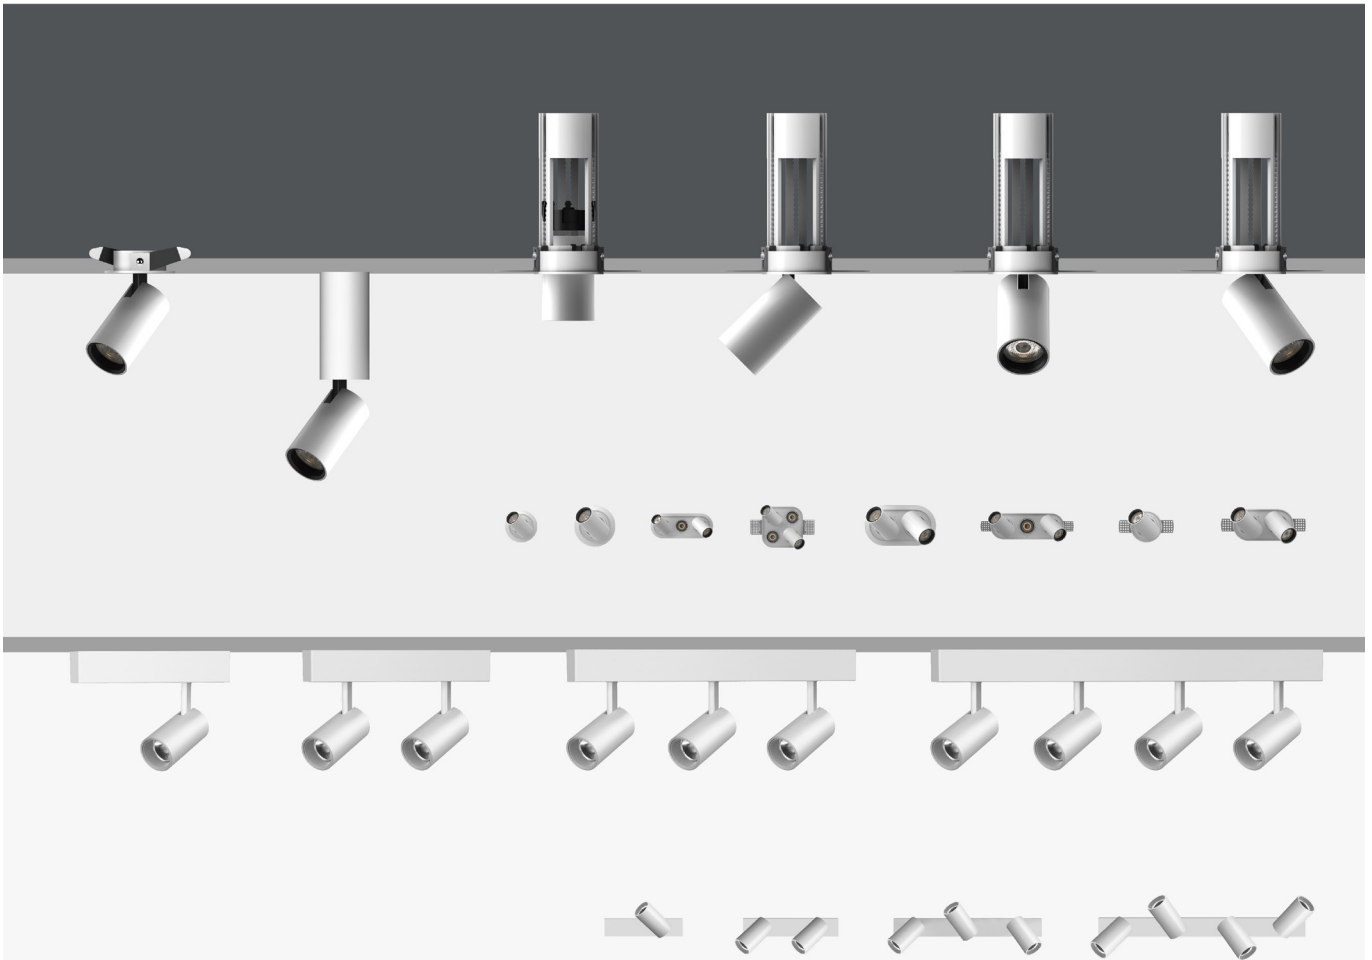

Adjustable Spot series

355°-Rotate degree ,90-Tilt degree for head1/2/3/4 head, trim or trimless
installation for choice



Villa Application Scene


The flexible multi-purpose structure of one lamp makes the lamp more widely used, and the horizontal rotation can be 355 degrees, Rotate 90 degrees vertically.



Apparel Store Application Scene

Deep anti glare design, $UGR < 19$, provides sufficient illumination and reduces glare, bringing you a comfortable visual experience.

ADJUSTABLE SPOT

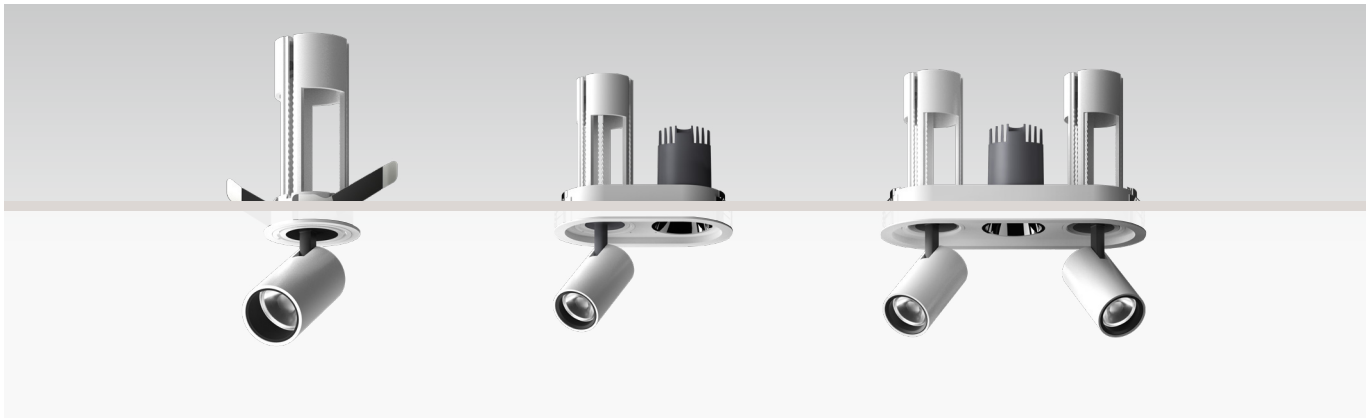

Colour:



White



Black






Gold



Chrome




Silver



LS3005T50/LS3005E70-250 / LS3005E70-350

Model Code	LS3005E70	LS3005E70-250	LS3005E70-350
Power	6W	2X6W	2x6W
Cut out	Φ52mm	130xΦ68	188xΦ68
Light Source	HONOURTEK	HONOURTEK	HONOURTEK
Size(DxH)	Ø58xH118	Ø140x80xH125	Ø200x80xH125
UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°
CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

LINA

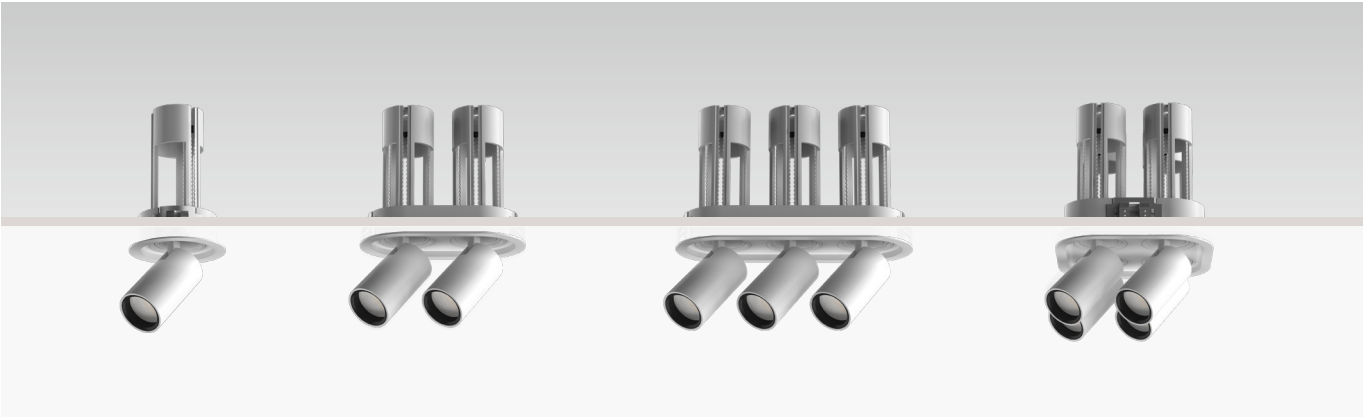

Colour:




White+White White+Black Black+Gold Black+Black

Optional :



Honey comb Soft Lens Square Stripe

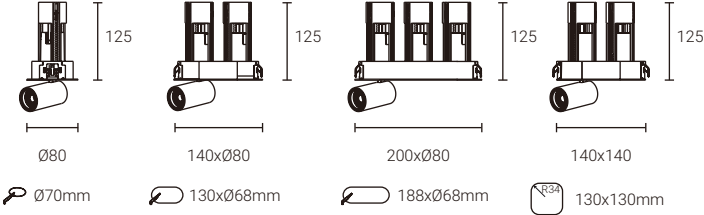

LS3005E70 / LS3005E70-2 / LS3005E70-3 / LS3005E70-4

Model Code	LS3005E70	LS3005E70-2	LS3005E70-3	LS3005E70-4
Power	6W	2x6W	6Wx3	6Wx4
Cut out	Φ70mm	130xΦ80mm	188xΦ80mm	130x130mm-R34
Light Source	HONOURTEK	HONOURTEK	HONOURTEK	HONOURTEK
Size(DxH)	Φ80x125mm	140xΦ80x125mm	Ø200x80xH125	Ø140x140xH125

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°	12°/24°/38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

ADJUSTABLE SPOT



Colour:



White



Black




Gold



Chrome



Silver

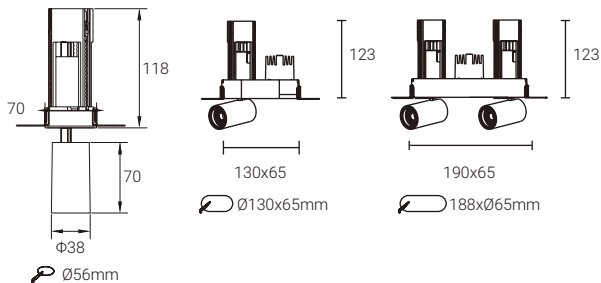


LS3005T50/LS3005T70-250 /LS3005T70-350

Model Code	LS3005T50	LS3005T70-250	LS3005T70-350
Power	6W	6Wx2	6Wx3
Cut out	Φ56mm	Φ130x65	Φ188x65
Light Source	HONOURTEK	HONOURTEK	HONOURTEK
Size(DxH)	Φ70x118mm	130x65x123	190x65x123

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12° /24° 38°/	12° /24°/ 38°	12°/ 24°/ 38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

LINA

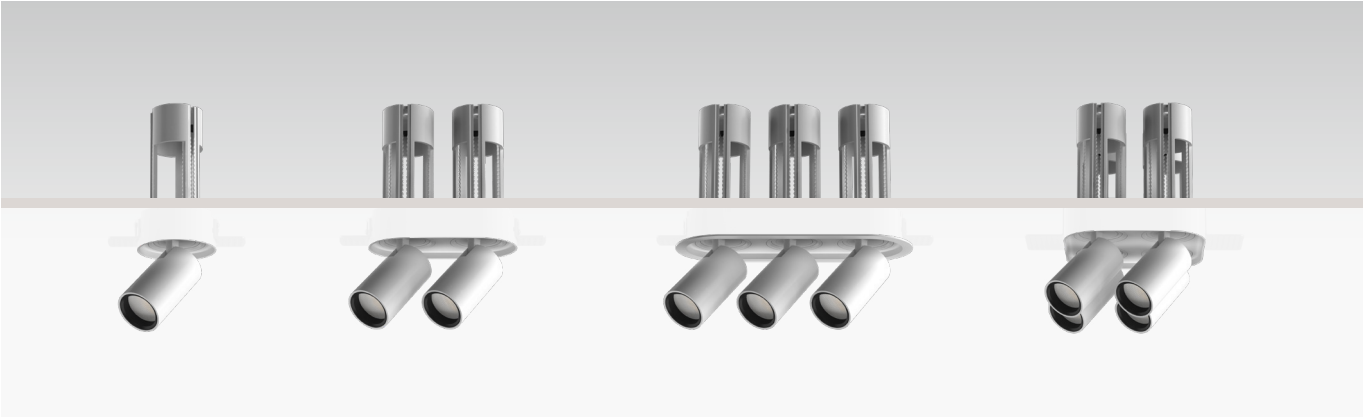

Colour:



White+White White+Black Black+Gold Black+Black


Optional :



Honey comb Soft Lens Square Stripe




123
Ø70



123
130x65



123
190x65



123
135x126



Ø70mm



130xØ68mm



190xØ65mm



135x135mm

LS3005T70 / LS3005T70-2 / LS3005T70-3 / LS3005T70-4

Model Code	LS3005T70	LS3005T70-2	LS3005T70-3	LS3005T70-4
Power	6W	2x6W	6Wx3	6Wx3
Cut out	Φ70mm	130xΦ65mm	190xΦ65mm	135x135mm-R34
Light Source	HONOURTEK	HONOURTEK	HONOURTEK	HONOURTEK
Size(DxH)	Φ70x123mm	130x65x123mm	190x65x123mm	135x126x123mm

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12° /24° /38°	12° /24° /38°	12° /24° /38°	12° /24° /38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

ADJUSTABLE SPOT



Colour:









White+White White+Black Black+Gold Black+Black

Optional :










Honey comb Soft Lens Square Stripe

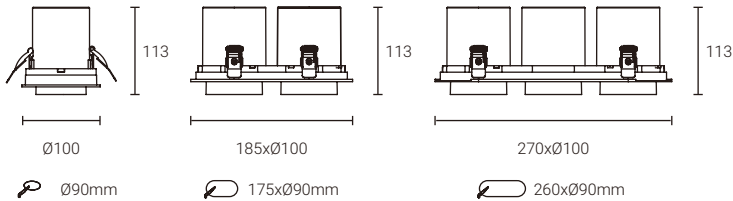

LS3005R90 / LS3005R90-2 / LS3005R90-3

Model Code	LS3005R90	LS3005R90-2	LS3005R90-3
Power	12W	2x12W	12Wx3
Cut out	Ø90mm	175xØ90mm	260xØ90mm
Light Source	CREE	CREE	CREE
Size(DxH)	Φ100x113mm	185xΦ100x113mm	270xΦ100x113mm
UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°
CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

LINA




Colour:

White+White White+Black Black+Gold Black+Black

Optional :

Honey comb Soft Lens Square Stripe

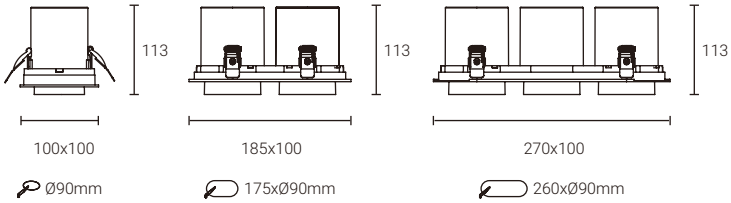

LS3005P90 / LS3005P90-2 / LS3005P90-3

Model Code	LS3005P90	LS3005P90-2	LS3005P90-3
Power	12W	2x12W	12Wx3
Cut out	Φ90mm	175xΦ90mm	260xΦ90mm
Light Source	CREE	CREE	CREE
Size(LxWxH)	100x100x113mm	185x100x113mm	270x100x113mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

ADJUSTABLE SPOT



Colour:



White+White



White+Black



Black+Gold



Black+Black

Optional :



Honey comb




Soft Lens



Square




Stripe



Ø130




Ø115mm



238xØ128



225xØ115mm



348xØ128



335xØ115mm

LS3005R120 / LS3005R120-2 / LS3005R120-3

Model Code	LS3005R120	LS3005R120-2	LS3005R120-3
Power	25W	25Wx2	25Wx3
Cut out	Ø115mm	225xØ115mm	335xØ115mm
Light Source	CREE	CREE	CREE
Size(DxH)	Ø130x135mm	238xØ128x135mm	348xØ128x135mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

LINA



Colour:




White+White White+Black Black+Gold Black+Black

Optional :




Honey comb Soft Lens Square Stripe




130x130

Ø115mm



238x130

225xØ115mm



348x130

335xØ115mm


LS3005P120 / LS3005P120-2 / LS3005P120-3

Model Code	LS3005P120	LS3005P120-2	LS3005P120-3
Power	25W	25Wx2	25Wx3
Cut out	Φ115mm	225xΦ115mm	335xΦ115mm
Light Source	CREE	CREE	CREE
Size(DxH)	130x130x135mm	238x130x135mm	348x130x135mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

ADJUSTABLE SPOT

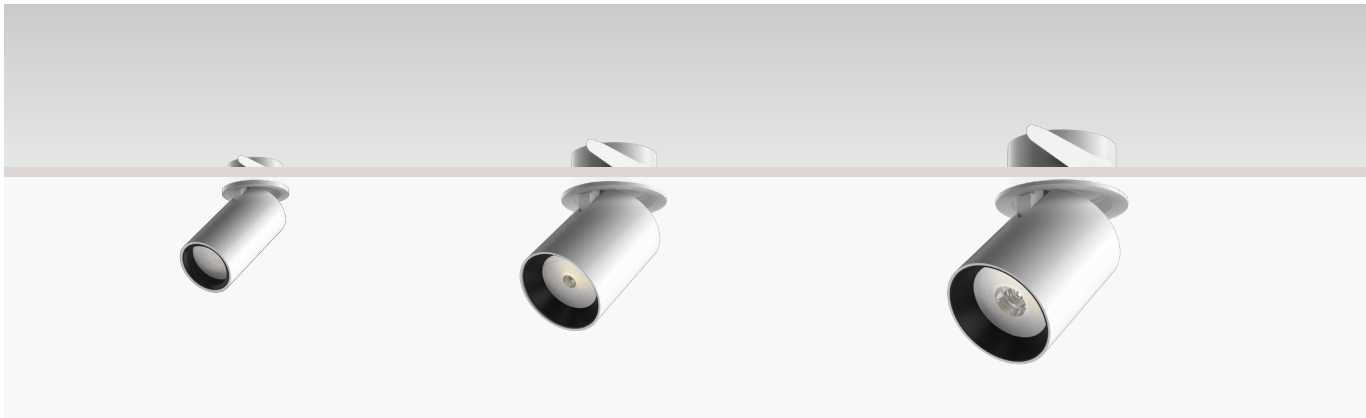


Colour:

White+White White+Black Black+Gold Black+Black

Optional :

Honey comb Soft Lens Square Stripe

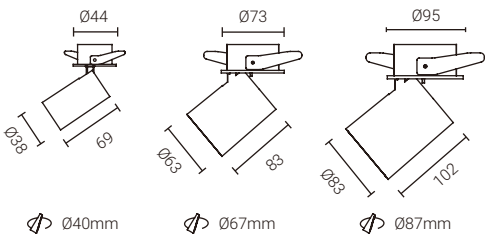


LS3001R40 / LS3001R65 / LS3001R85

Model Code	LS3001R40	LS3001R65	LS3001R85
Power	6W	12W	25W
Cut out	Φ40mm	Φ67mm	Φ87mm
Light Source	CREE	CREE	CREE
Size(DxH)	Φ44xΦ38xH102	Φ73xH118	Φ95xH135

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°


CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

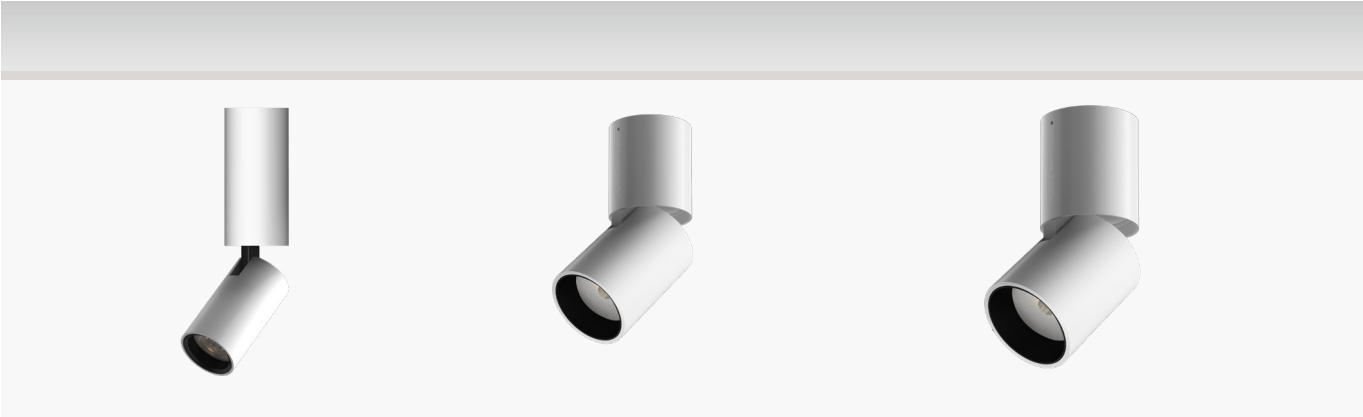

Colour:



Optional :

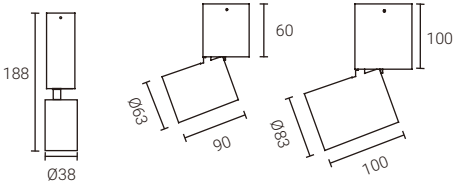

LS3003R40 / LS3003R65 / LS3003R85

Model Code	LS3003R40	LS3003R65	LS3003R85
Power	6W	12W	25W
Installation	Surface	Surface	Surface
Light Source	CREE	CREE	CREE
Size(DxH)	Φ38x188mm	Φ63x151mm	Φ83x201mm
UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°
CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

ADJUSTABLE SPOT



Colour:



White



Black




Gold



Chrome



Silver

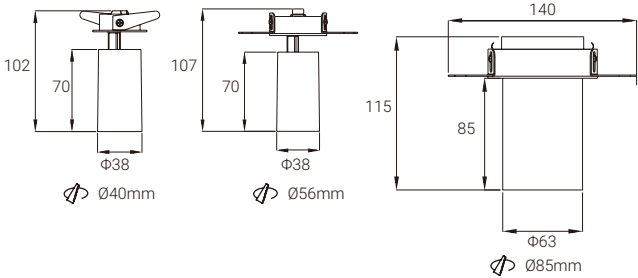

LS3001R40 /LS3001T56 / LS3001T85

Model Code	LS3001R40	LS3001T65	LS3001T85
Power	6W	6W	12W
Cut out	Φ40mm	Φ56mm	Φ85mm
Light Source	CREE	CREE	CREE
Size(DxH)	Φ50x38x102mm	Φ50x38x107mm	Φ140x63x115mm
UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°
CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

LINA




Colour:

Optional :

White+White White+Black Black+Gold Black+Black

Honey comb Soft Lens Square Stripe

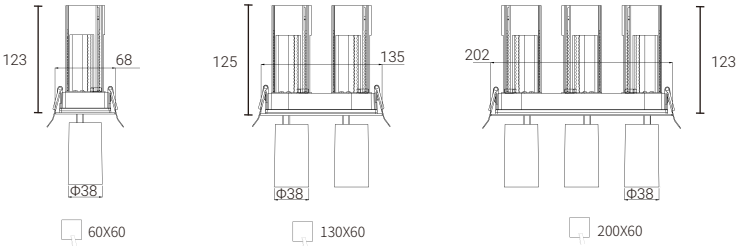

LS3005SE60 / LS3005SE60-2 / LS3005SE60-3

Model Code	LS3005SE60	LS3005SE60-2	LS3005SE60-3
Power	6W	2X6W	3X6W
Cut out	65X60mm	130X60mm	200X60mm
Light Source	CREE	CREE	CREE
Size(DxH)	68X68x123mm	135x68X123mm	202x68X123mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12° /24° /38°	12° /24° /38°	12° /24° /38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

ADJUSTABLE SPOT



Colour:



White+White



White+Black



Black+Gold



Black+Black

Optional :



Honey comb





Soft Lens



Square



Stripe



LS3005RE60-2 /LS3005RE60-3

Model Code	LS3005RE60-2	LS3005RE60-3
Power	2X6W	3X6W
Cut out	130mm	140mm
Light Source	CREE	CREE
Size(DxH)	Ø135x123mm	Ø147x123mm
UGR	<19	<19
CRI	≥80/≥90	≥80/≥90
Beam angle	12° /24° /38°	12° /24° /38°
CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h
IP	IP20	IP20


LINA



Colour:



Optional :

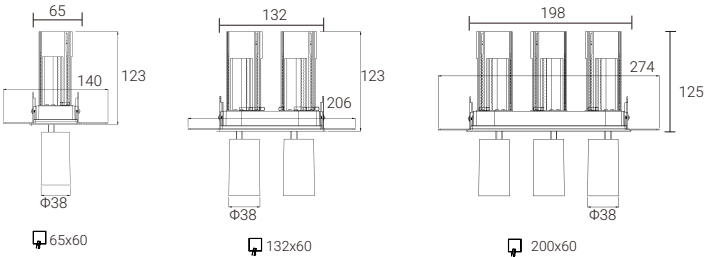


LS3005ST60 / LS3005ST60-2 / LS3005ST60-3

Model Code	LS3005ST60	LS3005ST60-2	LS3005ST60-3
Power	6W	2X6W	3X6W
Cut out	65X60mm	132X60mm	200X60mm
Light Source	CREE	CREE	CREE
Size(DxH)	65x60x123mm	132x60x123mm	198x60x123mm

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12° /24° /38°	12° /24° /38°	12° /24° /38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20


ADJUSTABLE SPOT

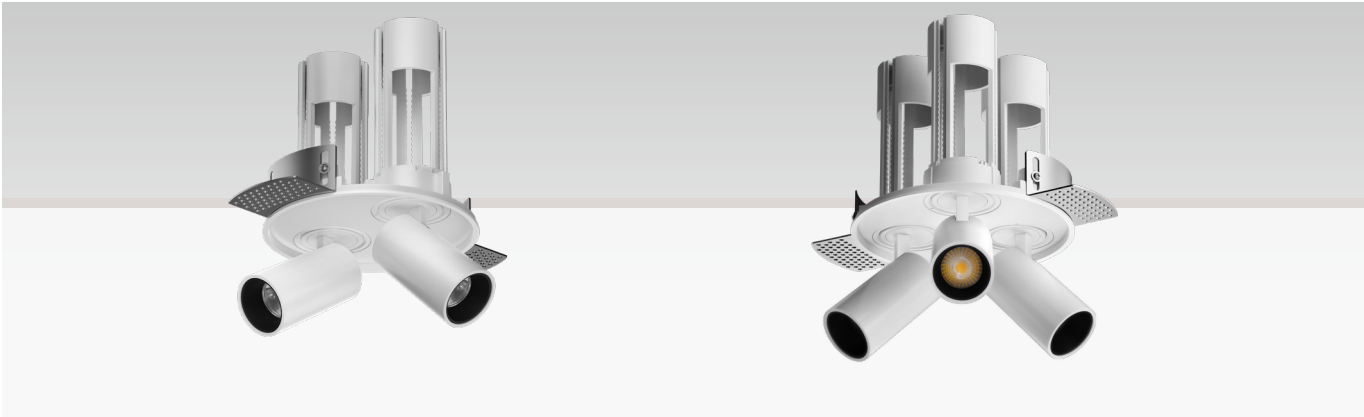

Colour:




Optional :

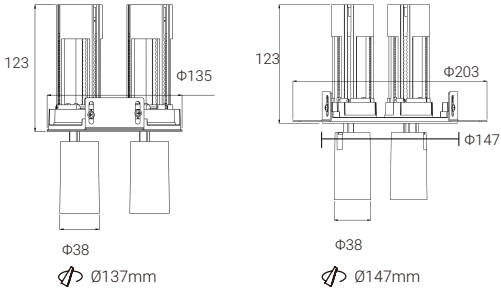

LS3005RT60-2 /LS3005RT60-3

Model Code	LS3005RT60-2	LS3005RT60-3
Power	2X6W	3X6W
Cut out	Φ137mm	Φ147mm
Light Source	CREE	CREE
Size(DxH)	Φ135x123mm	Φ147x123mm
UGR	<19	<19
CRI	≥80/≥90	≥80/≥90
Beam angle	12° /24° /38°	12° /24° /38°
CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h
IP	IP20	IP20

LINA

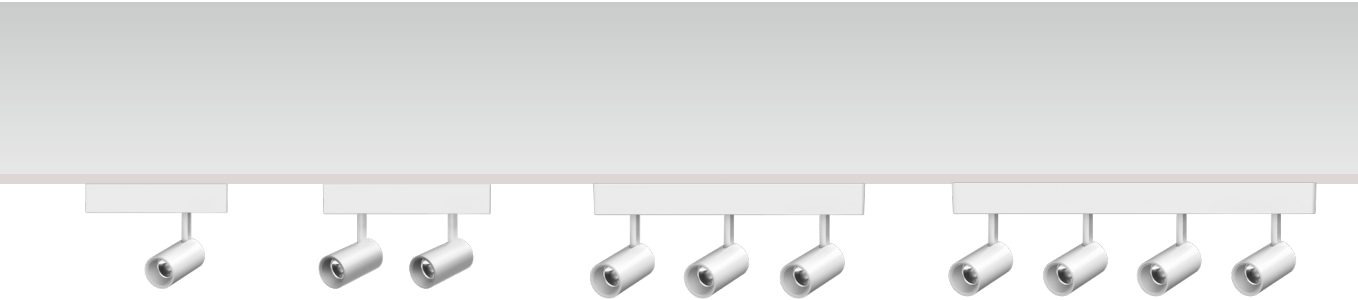

Colour:



White



Black




Gold



Chrome



Silver




T3007A-6W / T3007A-6W-2 / T3007A-6W-3/T3007A-6W-4

Model Code	T3007A-6W	T3007A-6W-2	T3007A-6W-3	T3007A-6W-4
Power	6W	2x6W	3x6W	4x6W
Installation	Surface	Surface	Surface	Surface
Light Source	CREE	CREE	CREE	CREE
Size(DxH)	Φ38x68mm	Φ38x68mm	Φ38x68mm	Φ38x68mm
Size(DxH)	32x38x160	32x38x204	32x38x310	32x38x416

UGR	<19	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°	12°/24°/38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20	IP20

ADJUSTABLE SPOT

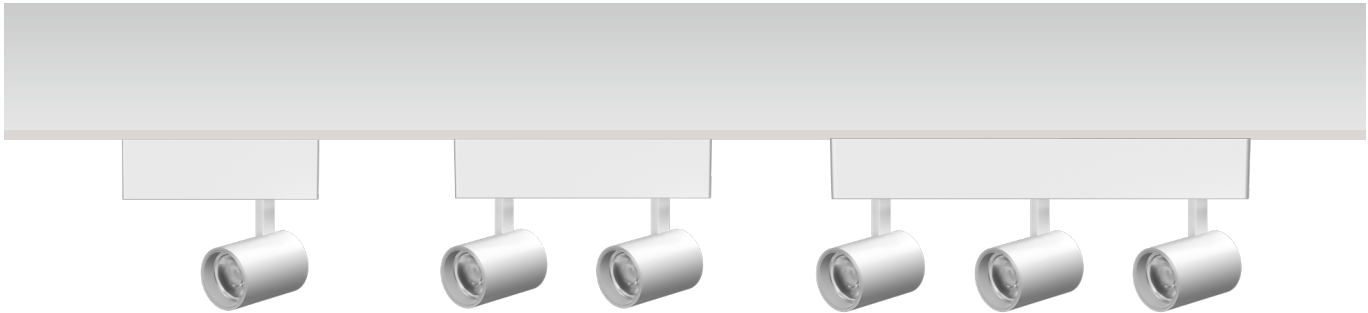

Colour:



White



Black






Gold



Chrome




Silver



T3007A-12W / T3007A-12W-2 / T3007A-12W-3

Model Code	T3007A-12W	T3007A-12W-2	T3007A-12W-3
Power	12W	2x12W	3x12W
Installation	Surface	Surface	Surface
Light Source	CREE	CREE	CREE
Size(DxH)	Φ63x83mm	Φ63x83mm	Φ63x83mm
Size(DxH)	50x58x190	50x58x252	50x58x402
UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°
CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

LINA

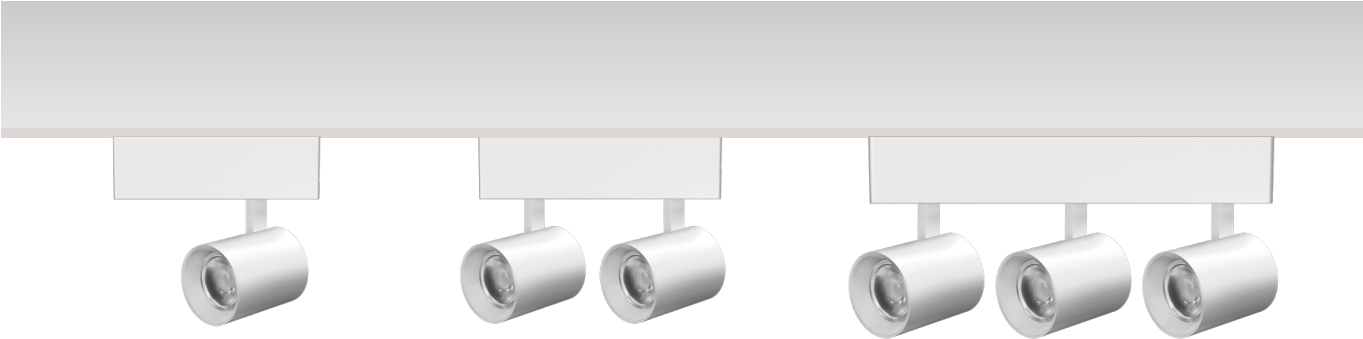

Colour:



White



Black




Gold



Chrome



Silver

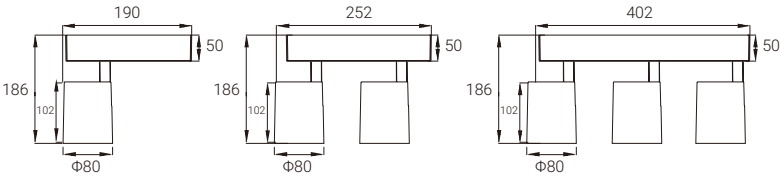

T3007A-25W / T3007A-25W-2 / T3007A-25W-3

Model Code	T3007A-25W	T3007A-25W-2	T3007A-25W-3
Power	25W	2x25W	3x25W
Installation	Surface	Surface	Surface
Light Source	CREE	CREE	CREE
Size(DxH)	Φ80x102mm	Φ80x102mm	Φ80x102mm
Size(DxH)	50x58x190	50x58x252	50x58x402

UGR	<19	<19	<19
CRI	≥80/≥90	≥80/≥90	≥80/≥90
Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°

CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
Life time	50000 h	50000 h	50000 h
IP	IP20	IP20	IP20

