

## Add Easy

Additive to apply Rubio Monocoat oil with spray method

Add Easy is a bio-based additive that can optionally be added to Oil Plus 2C and Hybrid Wood Protector to make the oil more liquid and therefore more sprayable. With this additive, the molecular binding of the oils is maintained, although the final result is less strong. We therefore recommend using it only with a maximum quantity of 10% and for treating vertical surfaces or surfaces not subject to abrasion (walls, inside cabinets, underside of table, etc.).



### PRODUCT INFORMATION


#### › Specific characteristics

- Biobased
- Makes Oil Plus 2C and Hybrid Wood Protector more liquid and better sprayable
- Easier to apply to rough surfaces with a brush
- The Add Easy facilitates the spreadability of the oil so that the wiping is easier afterwards
- Only suitable to treat vertical surfaces or surfaces not subject to abrasion (walls, inside cabinets, underside of table, etc.)

#### › Technical characteristics

- Physical state at 20°C: liquid
- Colour: colourless
- Odour: characteristic
- Density: 0.853 kg/l
- Viscosity at 20°C: 3.75 - 4.05 mPa.s
- Solubility in water: negligible
- Flash point: 121.5 °C
- Boiling point: 271 - 280 °C

#### › Packaging

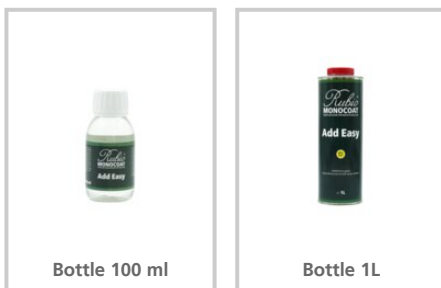

#### › Storage

The product can be stored for up to 12 months. Store in dry conditions and in the original packaging. Keep away from frost.

### APPLICATION INFORMATION

#### › Instructions

**STEP 1.** Add a maximum of 10% Add Easy to Oil Plus 2C or Hybrid Wood Protector.

**STEP 2.** Mix thoroughly.

**STEP 3.** Follow the instructions of the relevant TDS to apply the product.

#### › Tips & Tricks

- The mix of Oil Plus 2C or Hybrid Wood Protector with Add Easy can be stored for a considerable time.
- Mix well before use and stir regularly during application.
- Can also be used with the mix Oil Plus 2C / Hybrid Wood Protector + Accelerator comp. B (attention, only 4-6 hours processable in this case).

Check the packaging and the safety data sheet for more details.

For our complete assortment of products for the protection and colouring of interior and exterior wood, please visit

[www.rubimonocoat.com](http://www.rubimonocoat.com)

**LIABILITY:** It is the user's responsibility to establish, through his own tests, whether the product is suitable for the chosen application. In no case can Muylle Facon NV be held liable for any consequential damage. The information above may be subject to changes, which will be published in the updated versions of the technical data sheet. We cannot be held liable for poor results due to causes that are not related to the quality of the product. This technical information has been drawn up based on the currently available information and knowledge. The most recent technical data sheets can be requested or are available on the website. **Date of TDS: 23/11/2023. Check the safety information before using the product.**



Rubio<sup>®</sup>  
**MONOCOAT**  
MUYLLE  FACON

**Muylle Facon NV**

Ambachtenstraat 58

8870 Izegem (BELGIUM)

Phone +32 (0) 51 30 80 54

Fax +32 (0) 51 30 99 78

info@muyllefacon.be

[www.rubimonocoat.com](http://www.rubimonocoat.com)