

## #1A Expanded Corner Bead (CBXA)

### Galvanized steel expanded flange corner bead for exterior corners

A solid nose, all-purpose exterior corner bead. Strong and economical with multiple general use purposes.

The wide, expanded-wing flanges are flexible and can compensate for most irregular surfaces providing even grounds and straight corners. The expanded steel near the nose of the corner bead provides multiple plastering and stucco keys allowing for reinforcement and strength where it is needed the most. In addition to reinforcing corners, the #1A Corner Bead can also be used as a return accessory around any recessed opening or as a corner for spray-applied fireproofing when the column of bead is boxed in.

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives. The selection of the appropriate type of material for accessories shall be determined by the surrounding climatic and environmental conditions such as salt air, industrial pollution, and high humidity. The #1A Corner Bead is available in Zinc for approved corrosion resistance.

### Product Data & Ordering Information:

**Material:** .0172 base steel, 26 Gauge, G-60 Hot-Dipped Galvanized Steel.

Also available in 99.97% pure Zinc, compliant with ASTM B-69.

**Dimensions:** Nominal 2-7/8" Full Wing Flange

Length	Pcs./Ctn.	Ft./Ctn.	Ctn./Skid	Wt./Ctn.
10'	30	300'	20	49 lbs.

### Code Approvals & Performance Standards

- [ASTM A653](#) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- [ASTM C1063](#) Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- [ASTM C1861](#) Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- [Intertek CCRR-0204](#) Metal Lath - Code Compliance Research Report
- [SDS For ASTM A653 Steel Finishing Products](#) For Interior Finishing and Exterior Finishing

### Storage:


All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination conforming to ASTM C1063.

### Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or portland cement stucco containing calcium chloride additives. The selection of the appropriate type of material for accessories shall be determined by the surrounding climatic and environmental conditions such as salt air, industrial pollution and high humidity.

**Sustainability Credits** For more details and LEED letters contact Technical Services at 888-437-3244 or visit [clarkdietrich.com/LEED](http://clarkdietrich.com/LEED).

- **LEED v4.1 MR Credit:** Environmental Product Declarations: EPD (1 point) - Sourcing of Raw Materials (up to 2 points) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points)
- **LEED v4 MR Credit:** Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

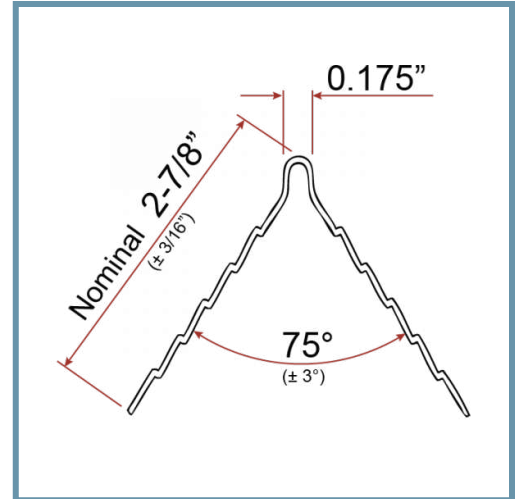

- Provides true, straight and accurate corners
- Flexible for irregular surfaces

